
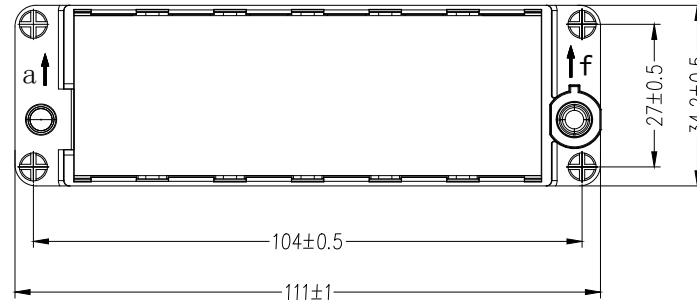



1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

No. of module: 6
 Wire gauge(PE contact):
 Power side: 4-10mm²/(12-8 AWG)
 Signal side: 1-2.5mm²/(18-14 AWG)
 Temperature Range-Operating: -40°C~+125°C
 Durability: 500 cycles MIN
 Material and Plating
 Body: zinc die-cast
 PE Terminal: copper alloy, 2μm NI plated
 Mounting Screw: Iron nickel plated

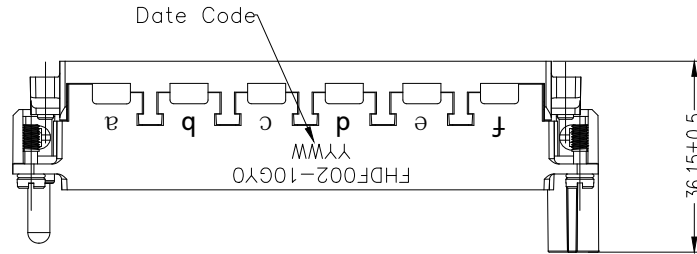

A
B
C
D
E
F

A
B
C
D
E
F

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Building Technology Cornerstone</p>	
	X. ±0.30	X.* ±5'	LEO	05/Jul/21	FHDF002-10GY0	FHDF002		
	DESIGN UNITS mm		CHECKED BY	DATE	TITLE		REV 0	SHEET NO. 1/1
	X.X ±0.20	X.X' ±2'	GISELLE	05/Jul/21	Heavy-duty connector HF24B Frame		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE			
		X.XXX ±0.10	X.XXX' ±0.5'	PYD	05/Jul/21			

1 2 3 4 5 6 7 8