


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS
No. of module: 2
Wire gauge(PE contact):
Power side: 4-10mm²/(12-8 AWG)
Signal side: 1-2.5mm²/(18-14 AWG)
Temperature Range-Operating: -40°C~+125°C
Durability: 500 cycles MIN
Material and Plating
Body: zinc die-cast
PE Terminal:copper alloy,Ni plated
Mounting Screw:Iron nickel plated

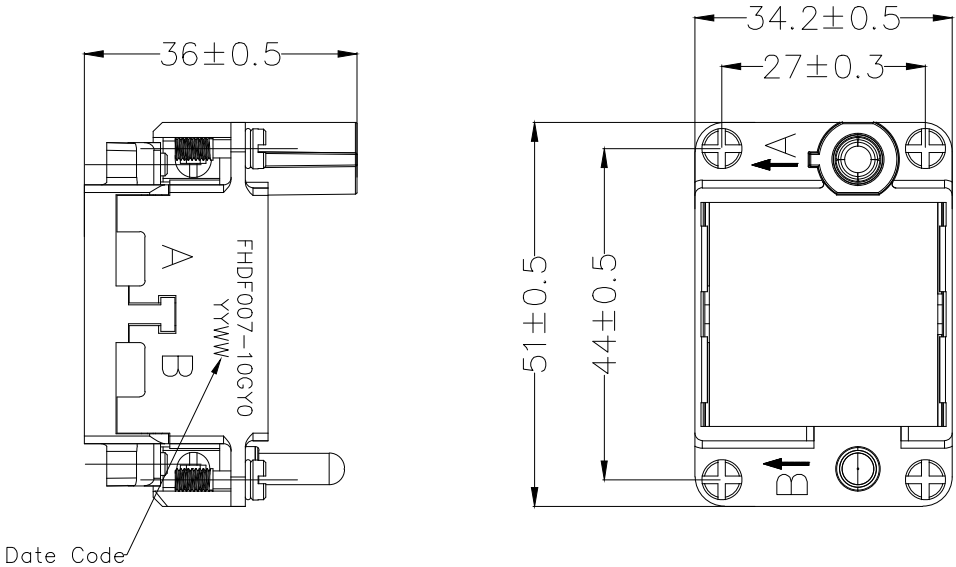

A

B

C

D

E

F

A

B

C

D

E

F

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHDF007-10GY0	ITEM NO. FHDF007	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Heavy-duty connector HF6B Frame	REV 0		
DESIGN UNITS mm		X.X ±0.20	X.X* ±2°	GISELLE	05/Jul/21				
		X.XX ±0.15	X.XX* ±1°	DRAWN BY	DATE			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XX* ±0.5°	PYD	05/Jul/21				