

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E

F

SPECIFICATIONS

No. of module: 2

Wire gauge(PE contact):

Power side: 4-10mm²/(12-8 AWG)

Signal side: 1-2.5mm²/(18-14 AWG)

Temperature Range-Operating: -40°C~+125°C

Durability: 500 cycles MIN

Material and Plating

Body: zinc die-cast

PE Terminal: copper alloy,NI plated

Mounting Screw:Iron nickel plated

A


B

C

D

E

F

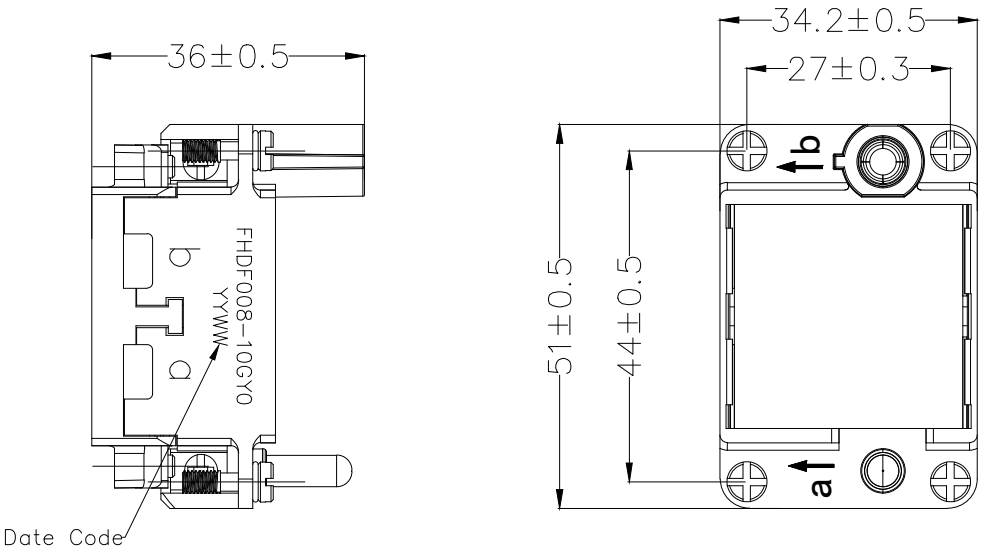

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHDF008-10GY0	ITEM NO. FHDF008	 Building Technology Cornerstone		
		X. ±0.30	X.* ±5°	CHECKED BY GISELLE	DATE 05/Jul/21	TITLE Heavy-duty connector HF6B Frame				
DESIGN UNITS mm		X.X ±0.20	X.X' ±2°	DRAWN BY PYD	DATE 05/Jul/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1°							
		X.XXX ±0.10	X.XX' ±0.5°							

1 2 3 4 5 6 7 8