
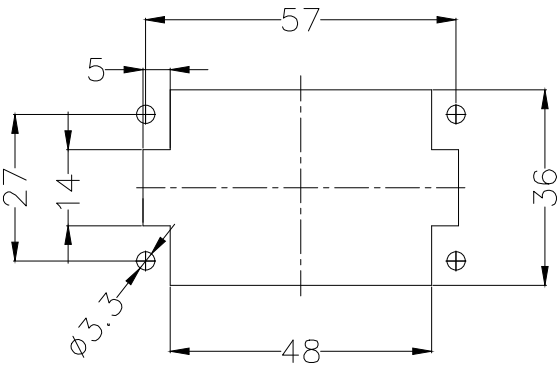
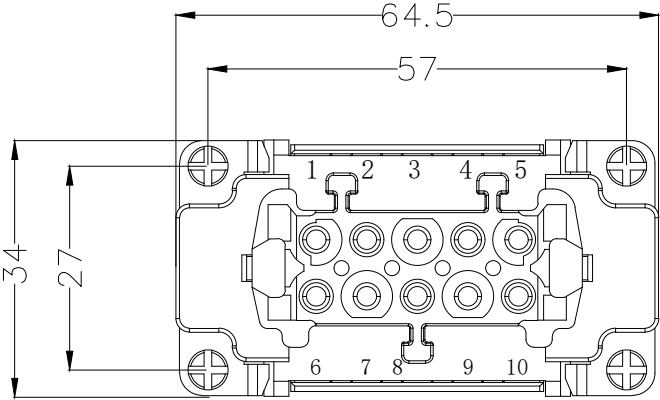
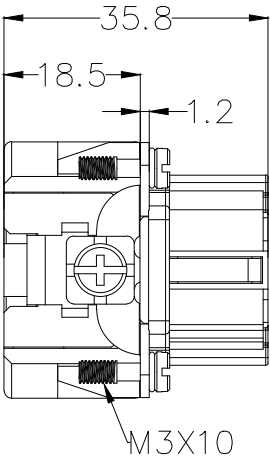


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters
No. of contact: 10+PE
Rated current:16A
Rated voltage:500V
Rated voltage acc.to UL/CSA: 600V
Contact resistance:1mΩ MAX
Wire gauge:0.14–4.0mm²(26–12 AWG)
Stripping length:7.5mm
Rated impulse voltage:6KV
Insulation resistance:10¹⁰Ω MIN
Temperature range:–40°C~+125°C
Pollution degree:3

Mechanical
Connection method:Riveting
Durability:500 cycles MIN
Material and Plating
Insulators:PC(UL 94V-0),Light grey

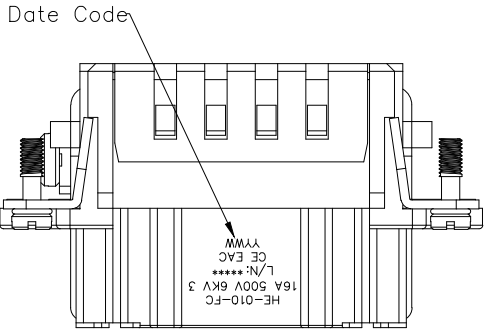

Recommended Panel Layout

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHE00010—F0100GYR0	ITEM NO. FHE00010	 Building Technology Cornerstone		
DESIGN UNITS mm		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Heavy-duty connector HE Insert		REV 0		SHEET NO. 1/1
		X.X ±0.20	X.X* ±2°	GISELLE	05/Jul/21					
		X.XX ±0.15	X.XX* ±1°			DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX* ±0.5°	PYD	05/Jul/21					