

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters





No. of contact: 40+PE
Rated current: 16A
Rated voltage: 500V
Rated impulse voltage: 6KV
Contact resistance: 1mΩ MAX
Wire gauge: 0.14–4mm²(26–12 AWG)
Insulation resistance: 10¹⁰Ω MIN
Temperature range: –40°C~+125°C
Pollution degree: 3

Mechanical

Connection method: Riveting
Durability: 500 cycles MIN

Material and Plating

Insulators: PC(UL 94V–0),Light grey

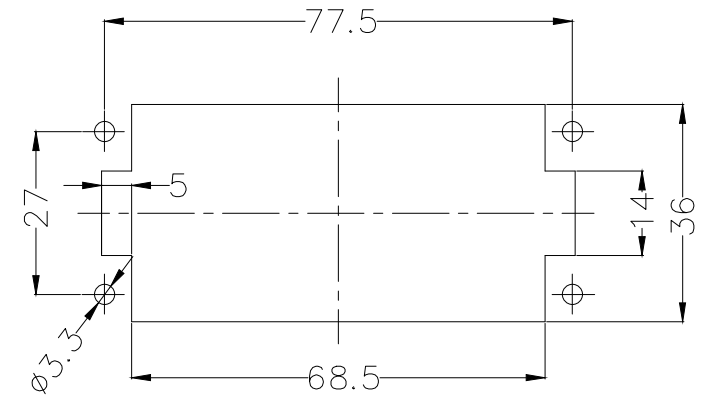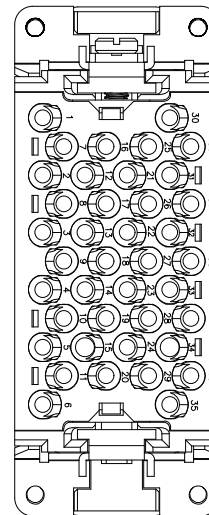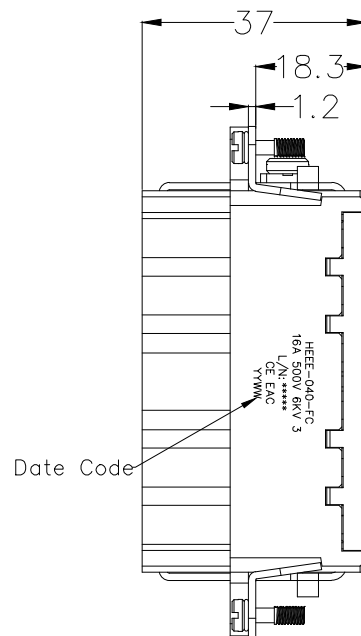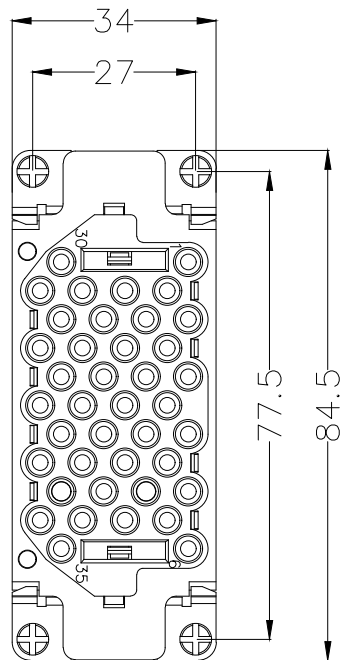

Recommended Panel Layout

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FHEEE004-F0400GYR0	ITEM NO. FHEEE004	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5'	CHECKED BY GISELLE	DATE 30/JUN/21	TITLE Heavy-duty connector HEEE Insert			
DESIGN UNITS mm		XX ±0.20	XX* ±2'		DRAWN BY PYD			DATE 30/JUN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
		XX ±0.15	XX* ±1'						
SCALE 5:1	SIZE A4	XXX ±0.10	XXX* ±0.5'				REV 0	SHEET NO. 1/1	