
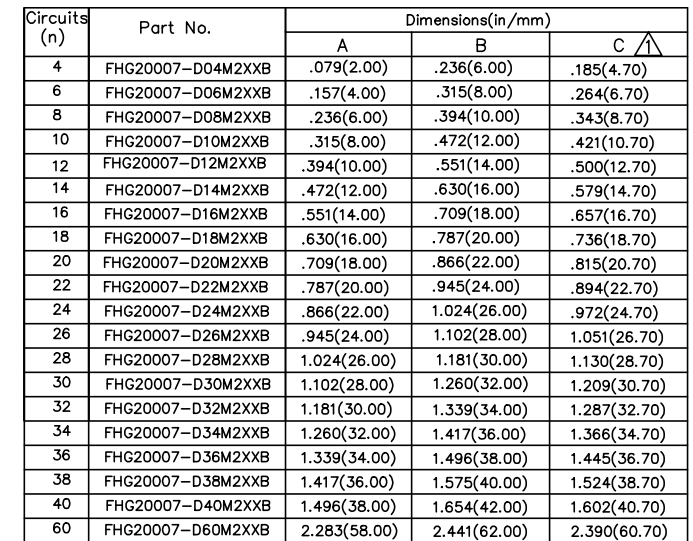


Electrical
Temperature Range—Operating: -25°C~+85°C
Material
Housing: PA66(UL 94V-0)
Applicable Terminal: FT20006
Mates With(Wafer): FWF20012, FWF20017 Series

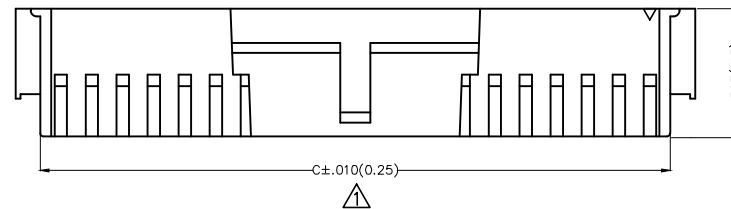

<u>FHG</u>	<u>200</u>	<u>07</u>	—	<u>D</u>	<u>XX</u>	<u>M</u>	<u>2</u>	<u>XX</u>	<u>B</u>
1	2	3		4	5	6	7	8	9

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FHG20007—DXXM2XXB	ITEM NO. FHG20007	 Leader Of Industry	
		X±.012(0.30)	X±.5"	CHECKED BY	DATE	TITLE Wire to Board Pitch 2.0mm(Housing)			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	X±.2"	JACOB	25/JUN/13			REV 1	
		X.XX±.006(0.15)	.XX±.1"	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX±.05"	CHERRY	25/JUN/13				