

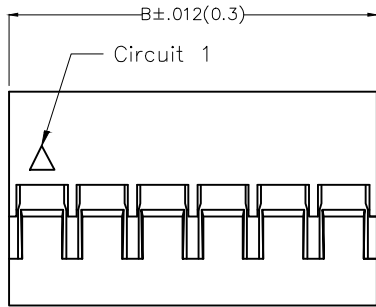


1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Flammability change	23/JAN/24	KATE	LEO

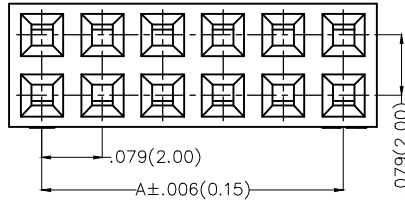

Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
4	FHG20010-D04M2K6B	.079(2.00)	.165(4.20)
6	FHG20010-D06M2K6B	.157(4.00)	.244(6.20)
8	FHG20010-D08M2K6B	.236(6.00)	.323(8.20)
10	FHG20010-D10M2K6B	.315(8.00)	.402(10.20)
12	FHG20010-D12M2K6B	.394(10.00)	.480(12.20)
14	FHG20010-D14M2K6B	.472(12.00)	.559(14.20)
16	FHG20010-D16M2K6B	.551(14.00)	.638(16.20)
18	FHG20010-D18M2K6B	.630(16.00)	.717(18.20)
20	FHG20010-D20M2K6B	.709(18.00)	.795(20.20)
22	FHG20010-D22M2K6B	.787(20.00)	.874(22.20)
24	FHG20010-D24M2K6B	.866(22.00)	.953(24.20)
26	FHG20010-D26M2K6B	.945(24.00)	1.031(26.20)
28	FHG20010-D28M2K6B	1.024(26.00)	1.110(28.20)
30	FHG20010-D30M2K6B	1.102(28.00)	1.189(30.20)
32	FHG20010-D32M2K6B	1.181(30.00)	1.268(32.20)
34	FHG20010-D34M2K6B	1.260(32.00)	1.346(34.20)
36	FHG20010-D36M2K6B	1.339(34.00)	1.425(36.20)
38	FHG20010-D38M2K6B	1.417(36.00)	1.504(38.20)
40	FHG20010-D40M2K6B	1.496(38.00)	1.583(40.20)

Ordering Information

FHG 200 10 — D XX M 2 K6 B
 1 2 3 4 5 6 7 8 9

1	Category FHG-Housing	2	Series Number 200-Pitch.20mm	3	Distinction No. 10	4	Row Option D-Double row	5	Circuits XX
6	Entry Type M-Male	7	Material-Resin 2-PA66	8	Color-Resin K6-Black	9	Packaging B-PE Bag		

Electrical
 Temperature Range-Operating: -25°C~+85°C
 Material
 Housing: PA66 (UL 94V-0) △
 Applicable Terminal: FT20009

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FHG20010-DXXM2K6B	ITEM NO. FHG20010	 Leader Of Industry
	X.±.012(0.30)	X.±5'	CHECKED BY JACOB	DATE 25/JUN/13	TITLE Wire to Board Pitch 2.0mm(Housing)		
	X.X±.008(0.20)	.X'±2'	DRAWN BY CHERRY	DATE 25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	X.XX±.006(0.15)	.XX'±1'					
X.XXX±.004(0.10)	.XXX'±0.5'						

1 2 3 4 5 6 7 8