
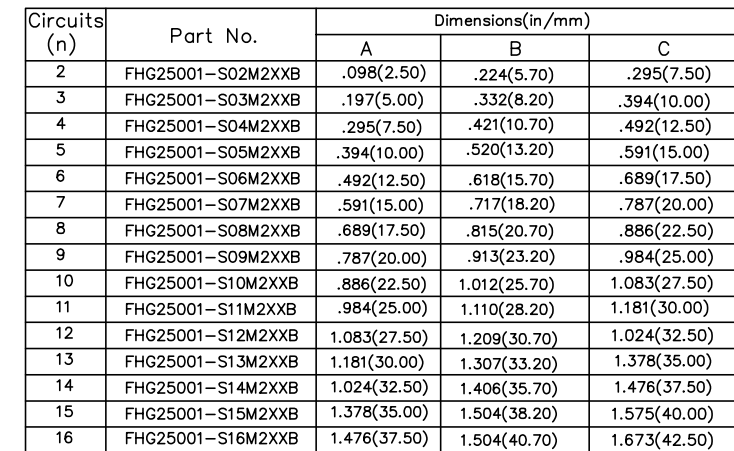


Electrical
Temperature Range—Operating: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
Material
Housing: PA66(UL 94V-0)
Applicable Terminal: FT25001
Mates With(Wafer): FWF25001,FWF25002, FWF25016, FWF25018,
FWF25019,FWF25020,FWF25021,FWF25028Series.



<u>FHG</u>	<u>250</u>	<u>01</u>	—	<u>S</u>	<u>XX</u>	<u>M</u>	<u>2</u>	<u>XX</u>	<u>B</u>
1	2	3		4	5	6	7	8	9

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED) X.±0.012(0.30) X.*±5°		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FHG25001-SXXM2XXB		ITEM NO. FHG25001		 Leader Of Industry	
						TITLE Wire to Board Pitch 2.50mm(Housing)		REV 1	SHEET NO. 1/1		
DESIGN UNITS Inch (metric)		X.X±0.008(0.20) X.*±2°		JACOB	DATE 25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
SCALE 5:1	SIZE A4	X.XX±.006(0.15) .XX*±1°									
		X.XXX±.004(0.10) .XXX*±0.5°		DRAWN BY CHERRY	DATE 25/JUN/13						