

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E

F

A

B




C

D

E

F

Electrical
 Temperature Range—Operating: -25°C~+85°C
 Material
 Housing: PA66 (UL94 V-2)
 Applicable Terminal: FT40001

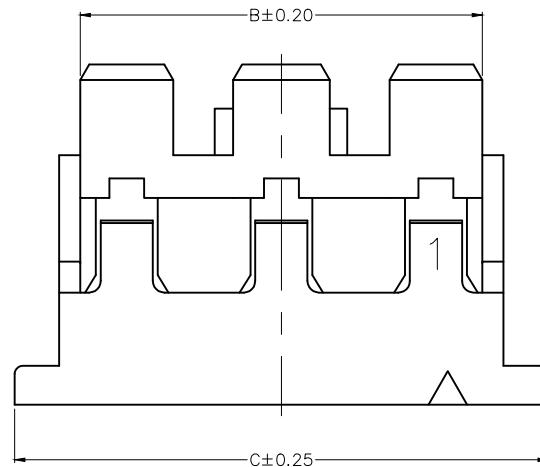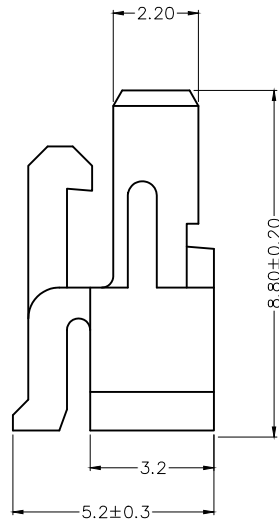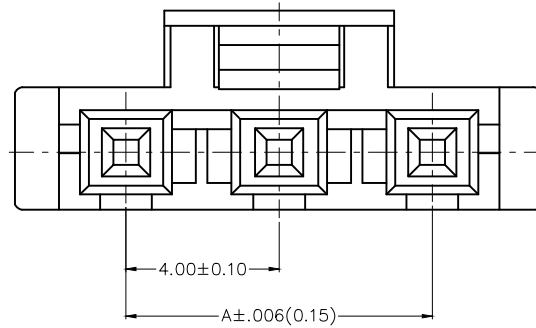

Circuits (n)	Part No.	Dimensions(in/mm)		
		A	B	C
2	FHG40003-S02M2W1B	4.00	6.40	9.80
3	FHG40003-S03M2W1B	8.00	10.40	13.80
4	FHG40003-S04M2W1B	12.00	14.40	17.80
5	FHG40003-S05M2W1B	16.00	18.40	21.80

Ordering Information

FHG 400 03 — S XX M 2 W1 B
 1 2 3 4 5 6 7 8 9

1	Category FHG—Housing	2	Series Number 400—Pitch4.00mm	3	Distinction No. 01	4	Row Option S—Single Row		
5	Circuits XX	6	Type M—Male	7	Material—Resin 2—PA66	8	Color—Resin W1—White	9	Packaging B—PE Bag

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 09/JUN/20	PART NO. FHG40003-SXXM2W1B	ITEM NO. FHG40003	<p>Leader Of Industry</p>		
	DESIGN UNITS metric	X.±0.30	X.±5'	CHECKED BY CHERRY	DATE 09/JUN/20	TITLE Wire to Board Pitch 4mm(Housing)		REV 0	SHEET NO. 1/1
	SCALE 5:1	SIZE A4	X.XX±0.15	.XX±1'	DRAWN BY ZOEY	DATE 09/JUN/20	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

1 2 3 4 5 6 7 8