


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Flammability Change	14/AUG/23	MATT	LEO

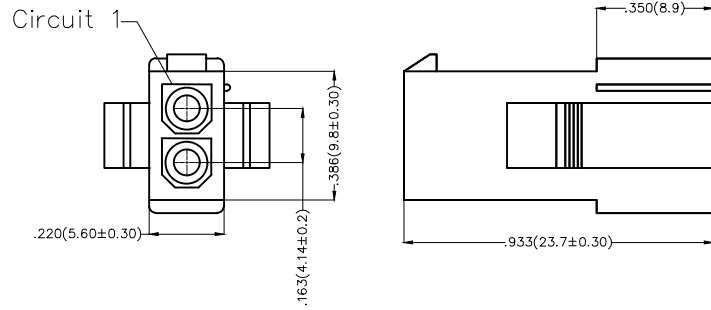


2 Circuits

Notes

- 1. Material: PA66 UL94V-0 △
- 2. Temperature Range: -25C° ~ +85C°
- 3. Mates With: FHG41401 Series

Circuits (n)	Part No.
2	FHG41405-S02F2W1B
3	FHG41405-S03F2W1B

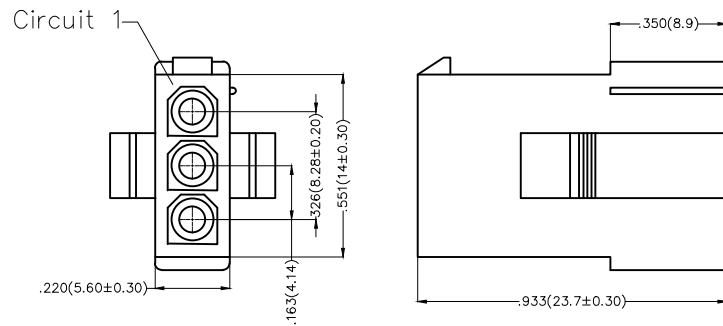

3 Circuits

Ordering Information

FHG 414 05 — S XX F 2 W1 B
 1 2 3 4 5 6 7 8 9

1	Category FHG-Housing	2	Series Number 414-Pitch4.14mm	3	Distinction No. 05	4	Row Option S-Single Row	5	Circuits XX
6	Entry Type F-Female	7	Material-Resin 2-PA66	8	Color-Resin W1-White	9	Packaging B-PE Bag		

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 22/SEP/21	PART NO. FHG41405-SXXF2W1B	ITEM NO. FHG41405	<p>Leader Of Industry</p>	
	X.±.012(0.30)	X.*±5'	CHECKED BY CHERRY	DATE 22/SEP/21	TITLE Wire to Wire Pitch 4.14mm(Housing)			REV 1
	DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X*±2'	DRAWN BY MATT	DATE 22/SEP/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	SCALE 5:1	SIZE A4	X.XX±.006(0.15)					