



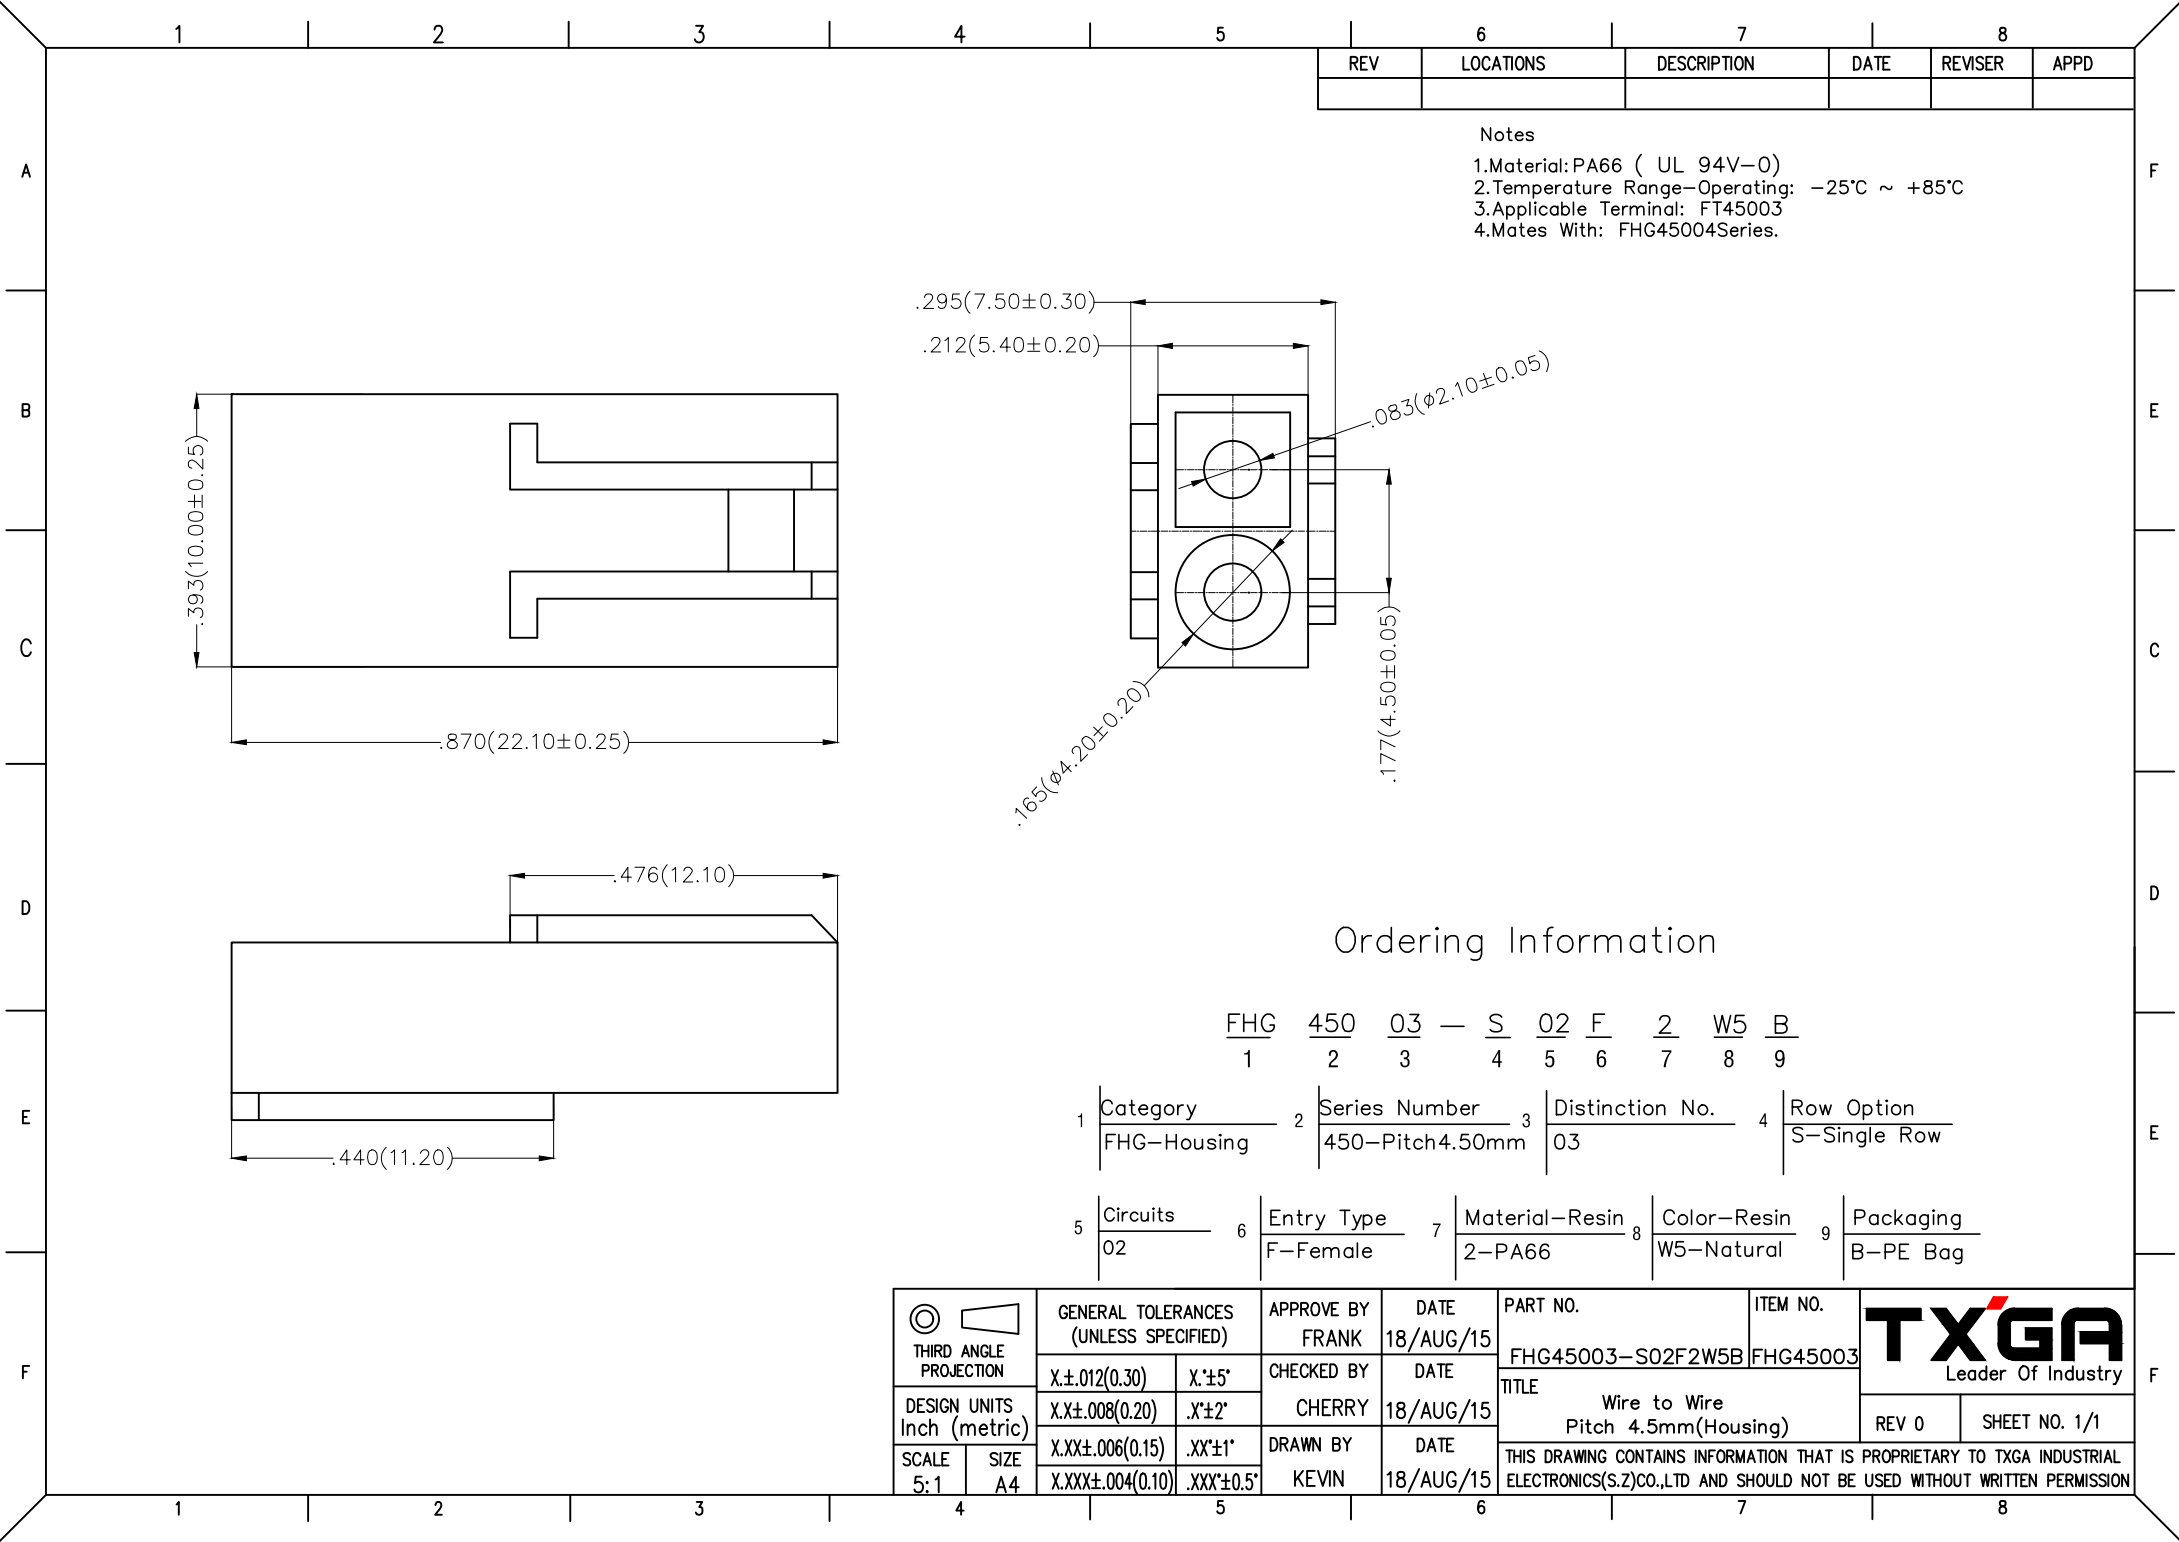

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes
1.Material:PA66 (UL 94V-0)
2.Temperature Range-Operating: -25°C ~ +85°C
3.Applicable Terminal: FT45003
4.Mates With: FHG45004Series.

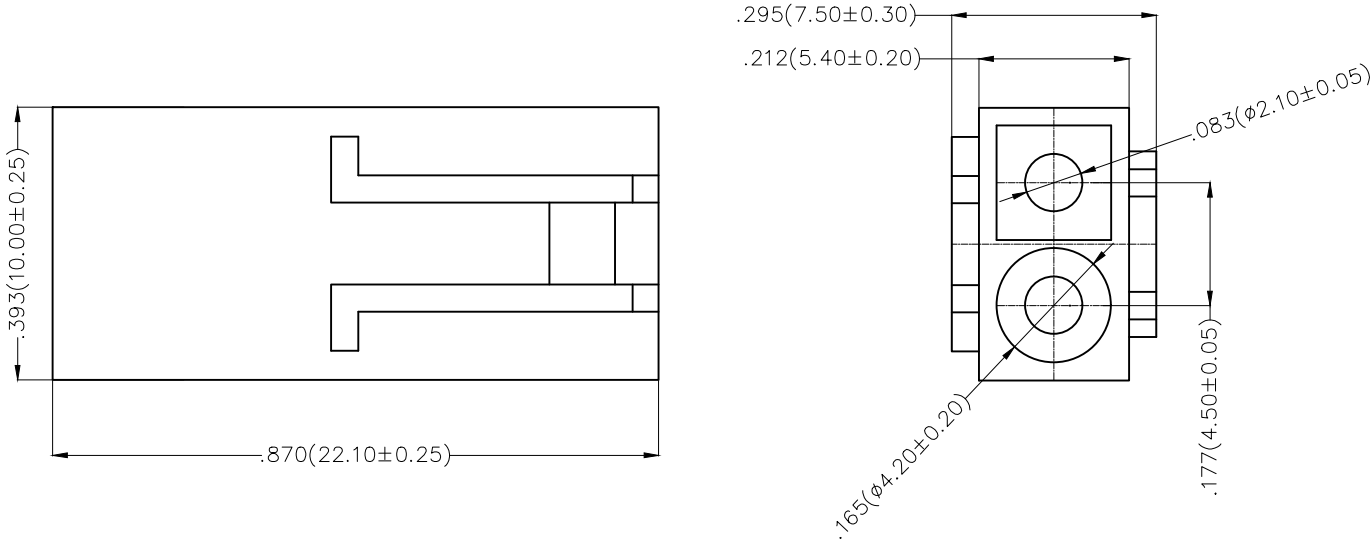

Ordering Information

FHG 450 03 - S 02 F 2 W5 B
1 2 3 4 5 6 7 8 9

1	Category	2	Series Number	3	Distinction No.	4	Row Option		
	FHG-Housing		450-Pitch4.50mm		03		S-Single Row		
5	Circuits	6	Entry Type	7	Material-Resin	8	Color-Resin	9	Packaging
	02		F-Female		2-PA66		W5-Natural		B-PE Bag

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/AUG/15	PART NO. FHG45003-S02F2W5B	ITEM NO. FHG45003	 Leader Of Industry	
		X.±.012(0.30)	X.±5°	CHECKED BY CHERRY	DATE 18/AUG/15	TITLE Wire to Wire Pitch 4.5mm(Housing)			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X'±2°	DRAWN BY KEVIN	DATE 18/AUG/15	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 1/1
		X.XX±.006(0.15)	.XX'±1°						
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5°						