
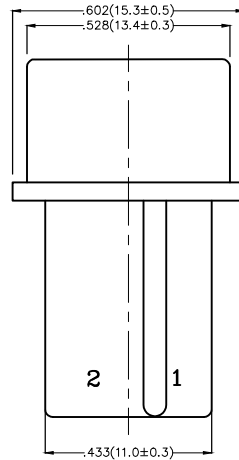
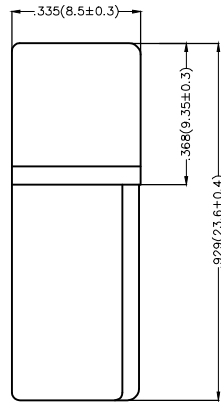


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes

- 1.Material:PA66 UL94V-2
- 2.Temperature Range: -25C° ~ +85C°
- 3.Applicable Terminal: FT50801
- 4.Mates With: FHG50806



Ordering Information

FHG 508 05 — S 02 F 2 T B
 1 2 3 4 5 6 7 8 9

1	Category	2	Series Number	3	Distinction No.	4	Row Option		
	FHG-Housing		508-Pitch5.08mm		05		S-Single Row		
5	Circuits	6	Type	7	Material-Resin	8	Color-Resin	9	Packaging
	02		F-Female		2-PA66		T-Transparent		B-PE Bag

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±.012(0.30)	X.±5'	FRANK	18/JUN/13	FHG50805-S02F2TB	FHG50805	
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		REV 0
SCALE	X.XX±.006(0.15)	.XX'±1'	JACOB	18/JUN/13	Wire to Board Pitch 5.08mm(Housing)		SHEET NO. 1/1
5:1	X.XXX±.004(0.10)	.XXX'±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SIZE A4			CHERRY	18/JUN/13			