
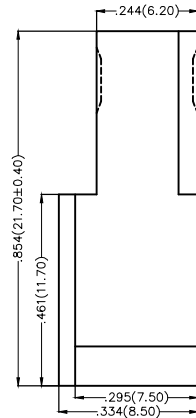
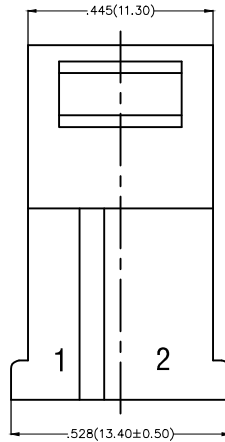


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes

- 1.Material:PA66 UL94V-2
- 2.Temperature Range: -25C° ~ +85C°
- 3.Applicable Terminal: FT50802
- 4.Mates With: FHG50805



Ordering Information

FHG 508 06 — S 02 M 2 T B
 1 2 3 4 5 6 7 8 9

1	Category	2	Series Number	3	Distinction No.	4	Row Option		
	FHG-Housing		508-Pitch5.08mm		06		S-Single Row		
5	Circuits	6	Type	7	Material-Resin	8	Color-Resin	9	Packaging
	02		M-Male		2-PA66		T-Transparent		B-PE Bag

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FHG50806-S02M2TB	ITEM NO. FHG50806	 Leader Of Industry	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20)	X.±5° .X'±2'	CHECKED BY JACOB	DATE 18/JUN/13	TITLE Wire to Board Pitch 5.08mm(Housing)		REV 0
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX'±1° .XXX'±0.5'	DRAWN BY CHERRY	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		