

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Flammability change	14/AUG/23	MATT	LEO

Electrical


Temperature Range—Operating: -25°C~+85°C

Material

Housing: PA66 (UL 94V-2) △

Applicable Terminal: FT62006-F2H

Mates With: FHG62004 Series

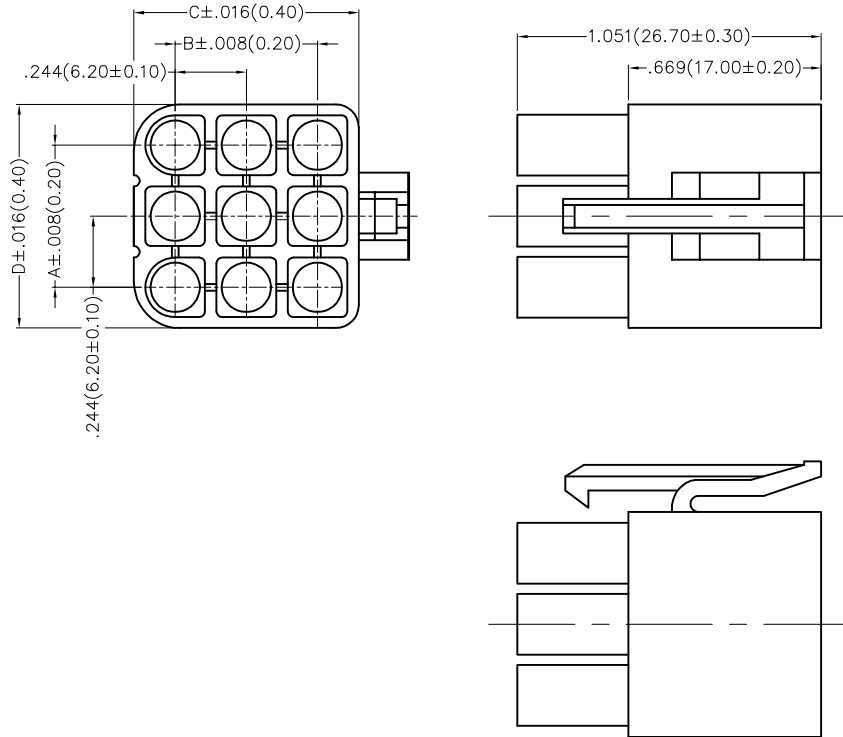

Circuits (n)	Part No.	Dimensions(in/mm)			
		A	B	C	D
2	FHG62006-S02M2TB	.244(6.20)	-	.283(7.20)	.528(13.40)
3	FHG62006-S03M2TB	.488(12.40)	-	.283(7.20)	.772(19.60)
4	FHG62006-D04M2TB	.244(6.20)	.244(6.20)	.528(13.40)	.528(13.40)
6	FHG62006-D06M2TB	.488(12.40)	.244(6.20)	.528(13.40)	.772(19.60)
9	FHG62006-T09M2TB	.488(12.40)	.488(12.40)	.772(19.60)	.772(19.60)
12	FHG62006-T12M2TB	.732(18.60)	.488(12.40)	.772(19.60)	1.016(25.80)
15	FHG62006-T15M2TB	.976(24.80)	.488(12.40)	.772(19.60)	1.260(32.00)

Ordering Information

FHG 620 06 - X XX M 2 T B
 1 2 3 4 5 6 7 8 9

1	Category FHG—Housing	2	Series Number 620—Pitch6.20mm	3	Distinction No. 06	4	Row Option S—Single Row D—Double Row T—Triple Row		
5	Circuits XX	6	Type M—Male	7	Material—Resin 2—PA66	8	Color—Resin T—Transparent	9	Packaging B—PE Bag

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FHG62006-XXXM2TB	ITEM NO. FHG62006	 Building Technology Cornerstone	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20)	X'.±5' .X'±2'	CHECKED BY CHERRY	DATE 18/JUN/13	TITLE Wire to Wire Pitch 6.2mm(Housing)		REV 1
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX'±1' .XXX'±0.5'	DRAWN BY KATE	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		