

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C


D

E

F

SPECIFICATIONS

No. of contact: 8
 Rated current: 1A
 Rated voltage: 50V
 Rated impulse voltage: 0.8kV
 Pollution degree: 3
 Rated voltage acc.to UL: <30V
 Transmission features: category 6/Class E
 up to 500 MHz; acc.
 to ISO/IEC 24 702;
 ISO/IEC 11 801
 Transmission rate: 10/100/1000Mbit/10Gbit/s
 Insulation resistance: $\geq 10^{10}\Omega$
 Temperature Range-Operating: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Durability: 500 cycles MIN
 Insulators: PC(UL 94V-0),Light grey

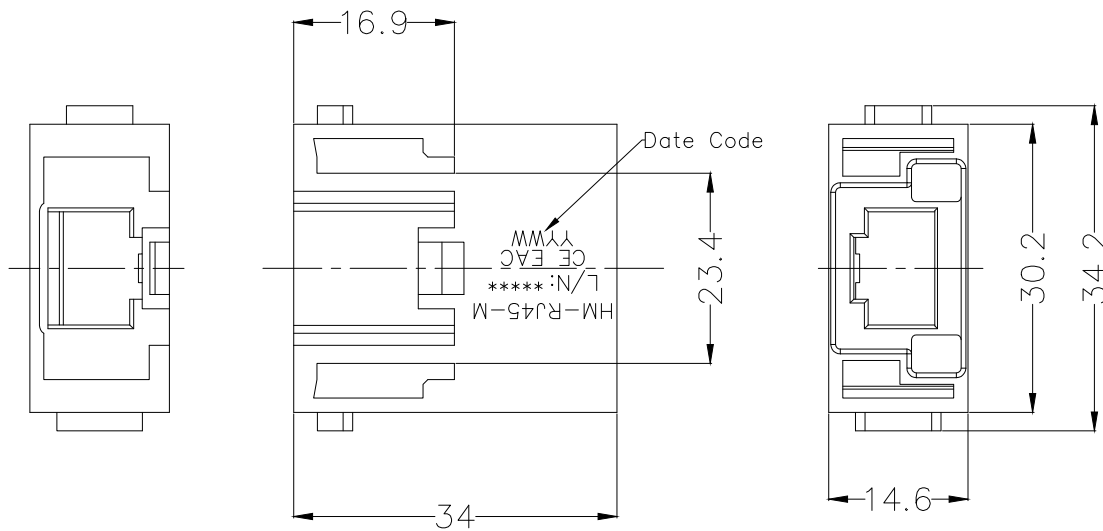

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Building Technology Cornerstone</p>
	X. ± 0.30	X.* $\pm 5^*$	LEO	05/Jul/21	FHM45001-M0000GY00	FHM45001	
	DESIGN UNITS mm		CHECKED BY	DATE	TITLE		REV 0 SHEET NO. 1/1
	X.X ± 0.20	X.X* $\pm 2^*$	GISELLE	05/Jul/21	Heavy-duty connector HM Insert		
SCALE 5:1	SIZE A4	X.XX ± 0.15	X.XX* $\pm 1^*$	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		X.XXX ± 0.10	X.XXX* $\pm 0.5^*$	PYD	05/Jul/21		

1 2 3 4 5 6 7 8