

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters




No. of contact: 12
 Rated current: 10A
 Rated voltage: 250V
 Rated impulse voltage: 4KV
 Insulation resistance: $10^{10}\Omega$ MIN
 Temperature range: $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$
 Pollution degree: 3

Mechanical

Connection method: Riveting
 Durability: 500 cycles MIN

Material and Plating

Insulators: PC(UL 94V-0), Light grey

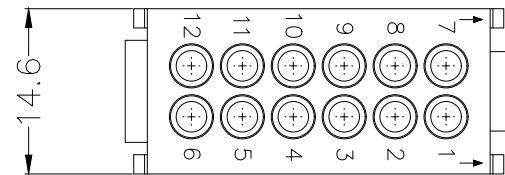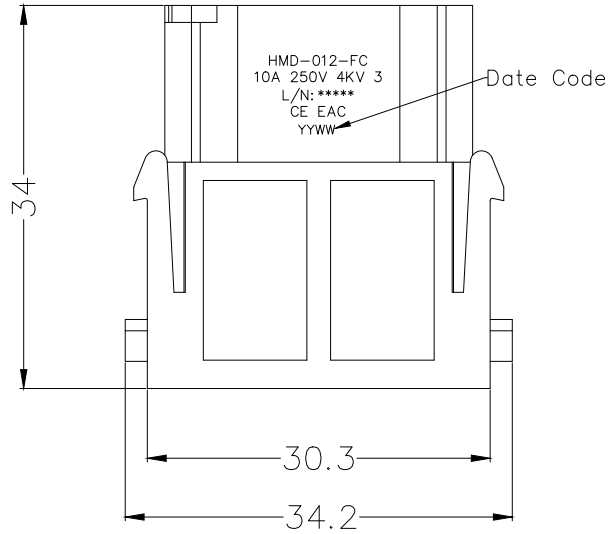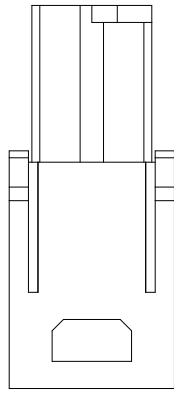

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Building Technology Cornerstone</p>
	X. ±0.30	X.* ±5'	LEO	05/Jul/21	FHMD0002-F0120GY00	FHMD0002	
	DESIGN UNITS mm		CHECKED BY	DATE	TITLE		REV 0 SHEET NO. 1/1
	X.X ±0.20	X.X' ±2'	GISELLE	05/Jul/21	Heavy-duty connector HMD Insert		
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
X.XXX ±0.10	X.XXX' ±0.5'	PYD	05/Jul/21				

1 2 3 4 5 6 7 8