




12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters
No. of contact: 17
Rated current:10A
Rated voltage:160V
Rated impulse voltage:2.5KV
Insulation resistance:10¹⁰Ω MIN
Temperature range:−40℃~+125℃
Pollution degree: 3

Mechanical
Connection method:Riveting
Durability: 500 cycles MIN
Material and Plating
Insulators:PC(UL 94V−0),Light grey

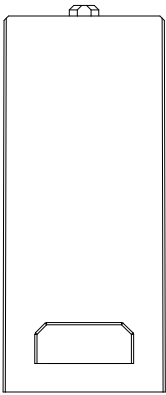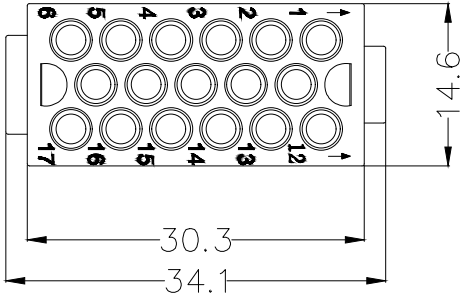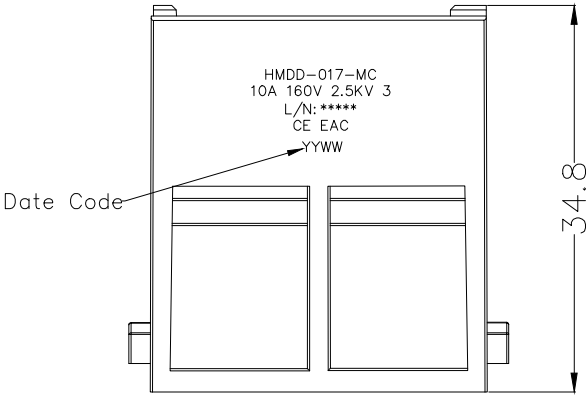

A

B

C

D

E

F

A

B

C

D

E

F

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FHMDD001-M0170GY00	ITEM NO. FHMDD001	 Building Technology Cornerstone	
DESIGN UNITS mm				CHECKED BY GISELLE	DATE 30/JUN/21				
		DRAWN BY PYD	DATE 30/JUN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
					X. ±0.30	X.* ±5°	X.X ±0.20	X.X* ±2°	X.XX ±0.15
SCALE 5:1	SIZE A4								

12345678