

12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E

F

A

B

C

D

E

F




SPECIFICATION

Technical Parameters

No. of contact: 17
Rated current:10A
Rated voltage:160V
Rated impulse voltage:2.5KV
Insulation resistance:10¹⁰Ω MIN
Temperature range:−40°C~+125°C
Pollution degree: 3

Mechanical

Connection method:Riveting
Durability:500 cycles MIN
Material and Plating
Insulators:PC(UL 94V−0),Light grey

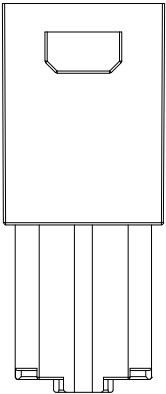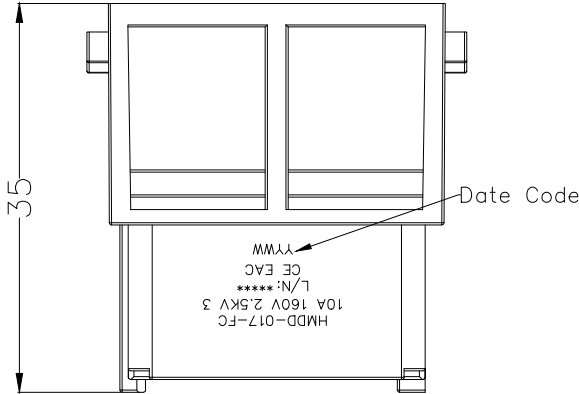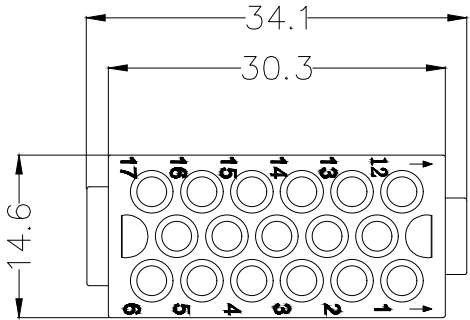

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FHMDD002-F0170GY00	ITEM NO. FHMDD002	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5'	CHECKED BY	DATE	TITLE			
DESIGN UNITS mm		X.X ±0.20	X.X' ±2'	GISELLE	30/JUN/21	Heavy-duty connector HMDD Insert		REV 0	SHEET NO. 1/1
		X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX' ±0.5'	PYD	30/JUN/21				

12345678