

12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A




B

C

D

E

F

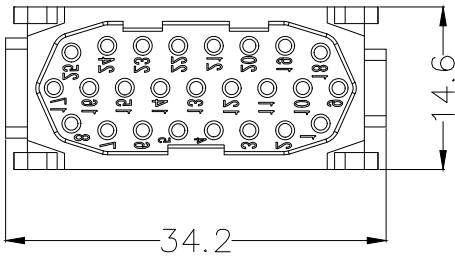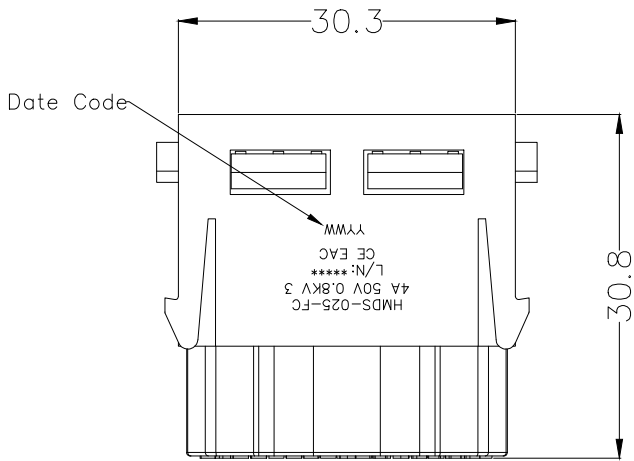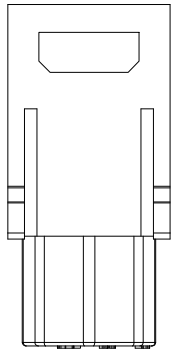

SPECIFICATION

Technical Parameters
No. of contact: 25
Rated current: 4A
Rated voltage: 50V
Rated impulse voltage: 0.8KV
Insulation resistance: 10¹⁰Ω MIN
Temperature range: -40°C~+125°C
Pollution degree: 3
Mechanical
Connection method: Riveting
Durability: 500 cycles MIN
Material and Plating
Insulators: PC(UL 94V-0), Light grey

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FHMDS002-F0250GY00	ITEM NO. FHMDS002	 Building Technology Cornerstone	
DESIGN UNITS mm		X. ±0.30	X.* ±5'	CHECKED BY	DATE	TITLE Heavy-duty connector HMDS Insert		REV 0 SHEET NO. 1/1	
		X.X ±0.20	X.X' ±2'	GISELLE	30/JUN/21				
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX ±0.10	X.XXX' ±0.5'	PYD	30/JUN/21				

12345678