

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E

F

SPECIFICATION

Technical Parameters


No. of contact: 6
Rated current: 16A
Rated voltage: 500V
Rated impulse voltage: 6KV
Insulation resistance: $10^{10}\Omega$ MIN
Temperature range: $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$
Pollution degree: 3

Mechanical

Connection method: Riveting
Durability: 500 cycles MIN

Material and Plating

Insulators: PC(UL 94V-0), Light grey

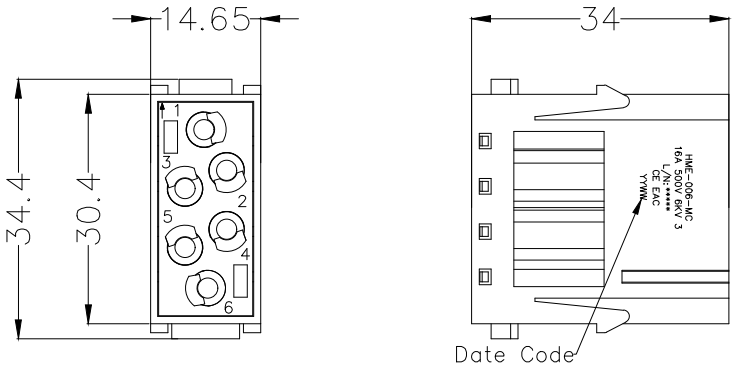

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHME0001-M0060GYR0	ITEM NO. FHME0001	 Building Technology Cornerstone	
				CHECKED BY GISELLE	DATE 05/Jul/21	TITLE Heavy-duty connector HME Insert			
DESIGN UNITS mm		X. ±0.30	X.* ±5*	DRAWN BY PYD	DATE 05/Jul/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.X ±0.20	X.X' ±2*						
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1*						
		X.XXX ±0.10	X.XX' ±0.5'						

1 2 3 4 5 6 7 8