

12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD


SPECIFICATION

Technical Parameters

No. of contact: 8
Rated current:16A
Rated voltage:400V
Rated impulse voltage:6KV
Insulation resistance:10¹⁰Ω MIN
Temperature range:−40°C~+125°C
Pollution degree:3

Mechanical

Connection method: Riveting
Durability:500 cycles MIN
Material and Plating
Insulators:PC(UL 94V−0),Light grey

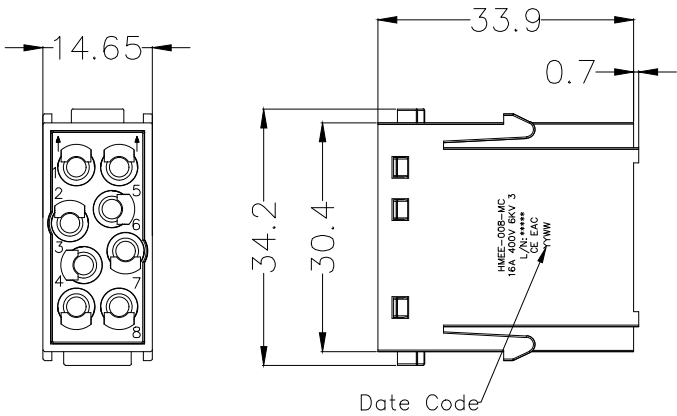

A

B

C

D

E

F

A

B

C

D

E

F

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHMEE001-M0080GYR0	ITEM NO. FHMEE001	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5°	CHECKED BY GISELLE	DATE 05/Jul/21	TITLE Heavy-duty connector HMEЕ Insert			
DESIGN UNITS mm		X.X ±0.20	X.X* ±2°	DRAWN BY PYD	DATE 05/Jul/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°					X.XXX ±0.10	X.XXX* ±0.5°

12345678