| REV | LOCATIONS | DESCRIPTION | DATE | REVISER | APPD |
|---|---|---|---|---|---|
| | | | | | |

SPECIFICATION

Technical Parameters
- No. of contact: 8
- Rated current: 16A
- Rated voltage: 400V
- Rated impulse voltage: 6KV
- Insulation resistance: $10^{10}\Omega$ MIN
- Temperature range: −40℃~+125℃
- Pollution degree: 3

Mechanical
- Connection method: Riveting
- Durability: 500 cycles MIN

Material and Plating
- Insulators: PC(UL 94V−0),Light grey

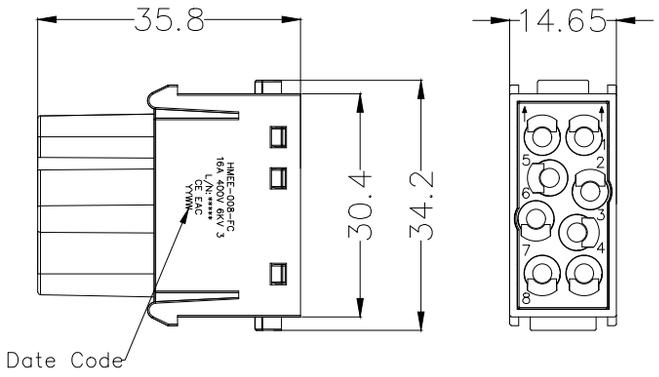


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| THIRD ANGLE PROJECTION | GENERAL TOLERANCES (UNLESS SPECIFIED) | | APPROVE BY LEO | DATE 05/Jul/21 | PART NO. FHMEE002-F0080GYR0 | ITEM NO. FHMEE002 | TXGA Building Technology Cornerstone |
| DESIGN UNITS mm | X. ±0.30 | X.° ±5° | CHECKED BY GISELLE | DATE 05/Jul/21 | TITLE Heavy-duty connector HMEE Insert | | REV 0 / SHEET NO. 1/1 |
| | X.X ±0.20 | X.X° ±2° | | | | | |
| | X.XX ±0.15 | X.XX° ±1° | DRAWN BY PYD | DATE 05/Jul/21 | | | |
| SCALE 5:1 / SIZE A4 | X.XXX ±0.10 | X.XXX° ±0.5° | | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | |