

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD




SPECIFICATION

Technical Parameters

- No. of contact: 4
- Rated current: 40A
- Rated voltage: 830V
- Rated impulse voltage: 8KV
- Insulation resistance: $10^{10}\Omega$ MIN
- Temperature range: $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$
- Pollution degree: 3

Mechanical

- Connection method: Riveting
- Durability: 500 cycles MIN
- Material and Plating
- Insulators: PC(UL 94V-0), Light grey

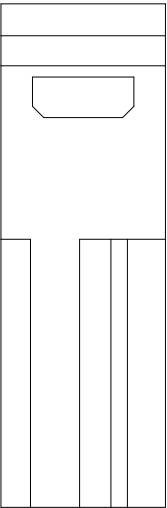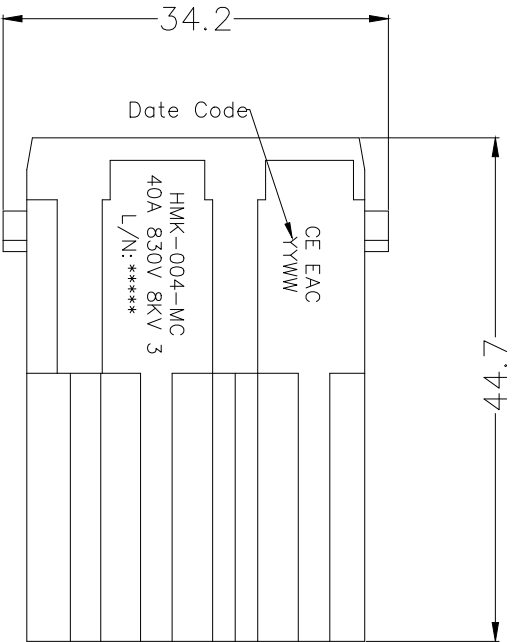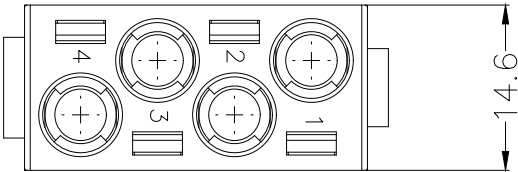

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Building Technology Cornerstone</p>	
	X. ±0.30	X.* ±5'	LEO	05/Jul/21	FHMK0001-M0040GY00	FHMK0001		
	DESIGN UNITS mm		CHECKED BY	DATE	TITLE		REV 0	SHEET NO. 1/1
	X.X ±0.20	X.X' ±2'	GISELLE	05/Jul/21	Heavy-duty connector HMK Insert			
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
		X.XXX ±0.10	X.XXX' ±0.5'	PYD	05/Jul/21			

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A

B

C

D

E

F