

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E

F

A

B

C


D

E

F

SPECIFICATION

Technical Parameters
No. of contact: 2
Rated current: 40A
Rated voltage: 1000V
Rated impulse voltage: 8KV
Contact resistance: 0.3mΩ MAX
Insulation resistance: 10¹⁰Ω MIN
Temperature range: -40°C~+125°C
Pollution degree: 3
Wire gauge: 1.5~10mm²(16~8 AWG)
Mechanical
Connection method: Riveting
Durability: 500 cycles MIN
Material and Plating
Insulators: PC(UL 94V-0),Light grey

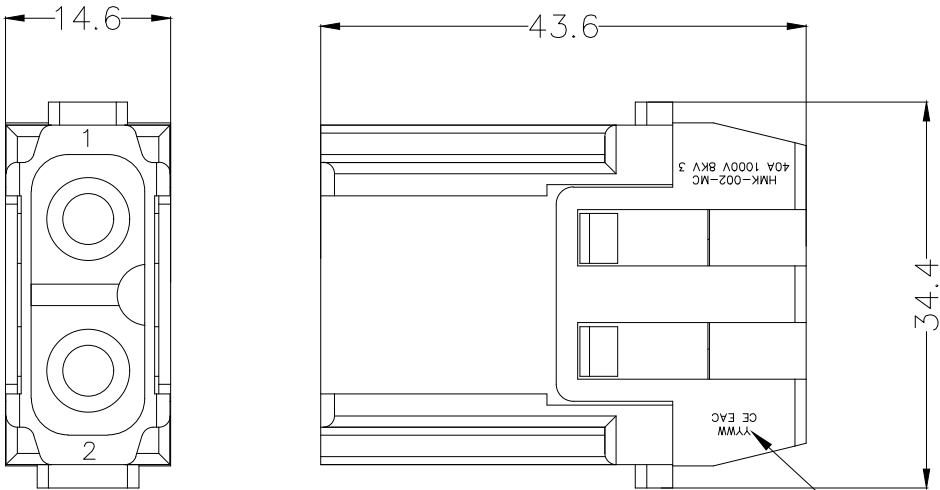

Date Code

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHMK0005-M0020GYR0	ITEM NO. FHMK0005	 Building Technology Cornerstone		
		X. ±0.30	X.* ±5'	CHECKED BY	DATE	TITLE				
DESIGN UNITS mm		X.X ±0.20	X.X' ±2'	GISELLE	05/Jul/21	Heavy-duty connector HMK Insert		REV 0		SHEET NO. 1/1
		X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX' ±0.5'	PYD	05/Jul/21					

1 2 3 4 5 6 7 8