
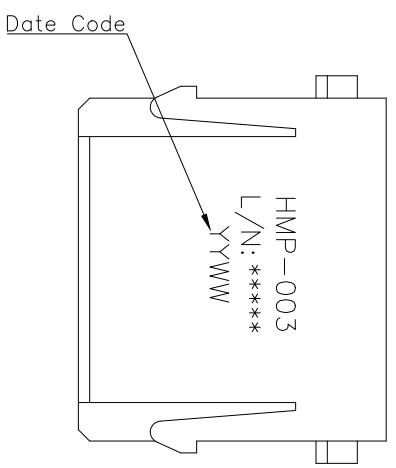
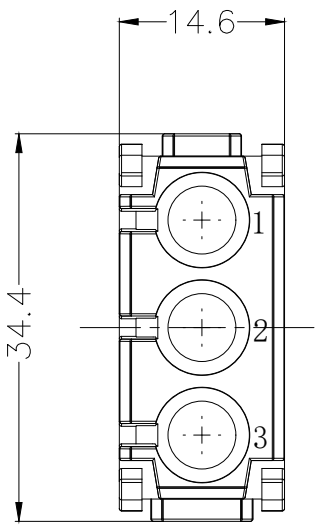
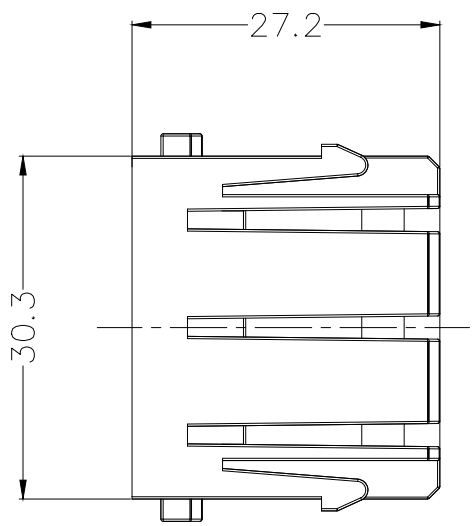


1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

No. of contact: 3
 Durability: 500 cycles MIN
 Temperature range: -40°C~+80°C
 Insulators: PC(UL 94V-0),Bule



A
B
C
D
E
F

A
B
C
D
E
F

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Building Technology Cornerstone</p>	
	X. ±0.30	X.* ±5'	LEO	05/Jul/21	FHMP0001-00030BU00	FHMP0001		
	DESIGN UNITS mm		CHECKED BY	DATE	TITLE		REV 0	SHEET NO. 1/1
	SCALE 5:1	SIZE A4	GISELLE	05/Jul/21	Heavy-duty connector HMP Insert		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE					
X.XXX ±0.10	X.XXX' ±0.5'	PYD	05/Jul/21					

1 2 3 4 5 6 7 8