

12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E


F

SPECIFICATION

Technical Parameters
No. of contact: 12+PE
Rated current:10A
Rated voltage:400V
Rated impulse voltage:6KV
Insulation resistance: $10^{10}\Omega$ MIN
Temperature range:−40°C~+125°C
Pollution degree:3
PE Wire gauge:0.5~2.5mm²(20~14AWG)

Mechanical
Connection method:Riveting
PE Connection method:Screw locking
Durability:500 cycles MIN

Material and Plating
Insulators:PC(UL 94V-0),Light grey
Terminal:copper alloy,1μm silver plated
Sealing element: NBR

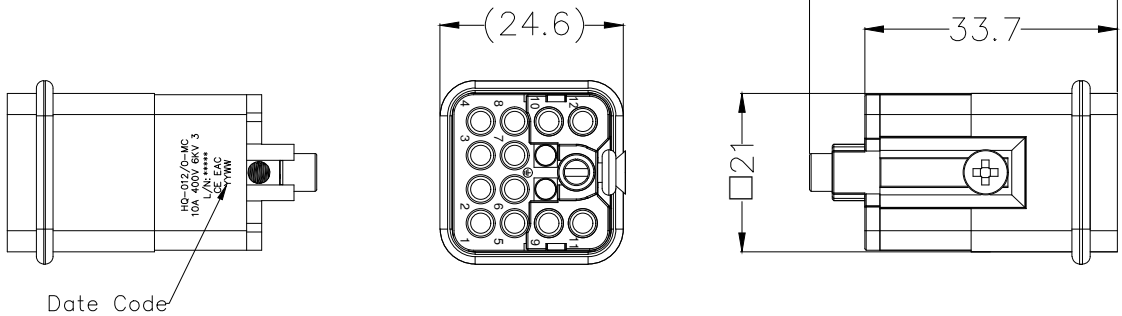

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHQ00005-M0124GYE0	ITEM NO. FHQ00005	 Building Technology Cornerstone	
DESIGN UNITS mm				X. ±0.30	X.* ±5°	CHECKED BY GISELLE	DATE 05/Jul/21		
		X.X ±0.20	X.X* ±2°	DRAWN BY PYD	DATE 05/Jul/21	REV 0	SHEET NO. 1/1		
		SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX ±0.10	X.XXX* ±0.5°						

12345678