



Circuits Coded	2Circuits	3Circuits	4Circuits	REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
				0		New Release	6/June		FRANK
A-Coded									
WIRING CHART	1 Brown	1 Brown	1 Brown						
	2	2	2 White						
	3 Blue	3 Blue	3 Blue						
	4	4 Black	4 Black						

Note:
 1. Ⓞ Important Dimension
 2. Degree of protection: IP68
 3. This product must meet IEC61076-2-105
 4. This product must meet 2011/65/EU ROHS compliance.
 5. Not note tolerances: ±0.20
 6. Rated voltage: 60V, Rated current 1A
 7. Temperature range: -40°C~+105°C
 8. Mechanical operation: >100 mating cycles
 9. Wire Size(mm²)/AWG: 0.14mm²/26AWG
 10. Flame test: UL94V-0

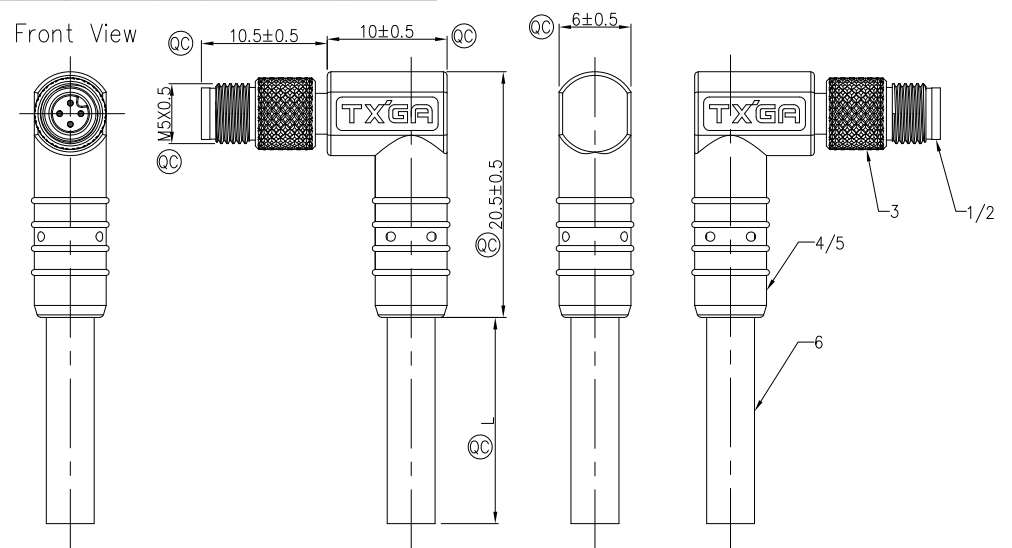

Range(length)	50 to 200	201 to 1000	1001 to 5000	5000 to 9000
Tolerance(mm)	±15	±30	±50	±100

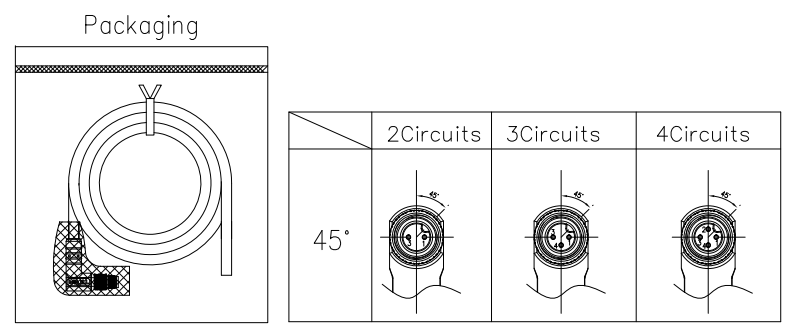

Ordering Information

FM5C 04 01 02 - A XX X XXXXX 00
 1 2 3 4 5 6 7 8

- 1 Series Name: FM5C-M5 Cable
- 2 Cable: 04-Male Right Angle Plug
- 3 thread type: 01-M5X0.5
- 4 Distinction No.: 02
- 5 Coded: A-A CODED
- 6 Circuits: 02-2Circuits, 03-3Circuits, 04-4Circuits
- 7 Key Angle: C-45°
- 8 Length: XXXXX-(see table1)

TABLE 1

CABLE LENGTH (XXXXX)	00050	00100	00150	00200	00990
50mm	100mm	150mm	200mm	990mm	
01000	01500	02000	03000	99900	
1M	1.5M	2M	3M	99.9M	

6	4C*26AWG,OD 4.0MM,PVC,Black
5	Overmold: PVC30P,Black
4	innermold: PVC30P,Black
3	Screw: Copper alloy Plated Ni
2	Housing: PA,Black
1	Male Pin: Copper alloy Plated Gold
NO.	SPECIFICATION

ELECTRICAL	
1.	Withstanding Voltage: DC 300V
2.	Conduction Impedance: 3Ω (Max)
3.	Insulation Resistance: 10MΩ (Min)
PACKING SPECIFICATION	
1.	1.1pcs/Bag
2.	Ⓞ as the key size control
NOTES	
1.	This product must meet UL486A-1991 mechanical performance
2.	This product must meet 2011/65/EU ROHS compliance

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	TXGA Building Technology Cornerstone
	X.±(0.30)	.X'±5'	FRANK	13/July/23	FM5C040102-AXXCXXXXX00	FM5C040102	
DESIGN UNITS Metric	X.XX±(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		REV 0 SHEET NO. 1/1
SCALE 2:1 SIZE A4	X.XX±(0.15)	.XX'±1'	CHERRY	13/July/23	M5X0.5 CABLE Right Angle SINGLE END MALE SIDE UNSHIELDED		
	X.XXX±(0.10)	.XXX'±0.5'	DRAWN BY DANIEL	DATE 13/July/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(SZ)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		