




1	2	3	4	5	6	7	8			
Circuits	3Circuits	4Circuits			REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
A-Coded					0		New Release	4/DEC	LAM	FRANK

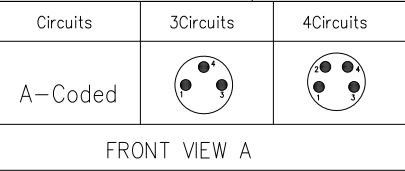

Note:
 1. Ⓞ Important Dimension
 2. Waterproof Rate: IP68
 3. This product must meet IEC61076-2-104
 4. This product must meet 2011/65/EU ROHS compliance.
 5. Not note tolerances: ±0.20
 6. Use torque values 1Nm

Recommended Panel Cut-Out

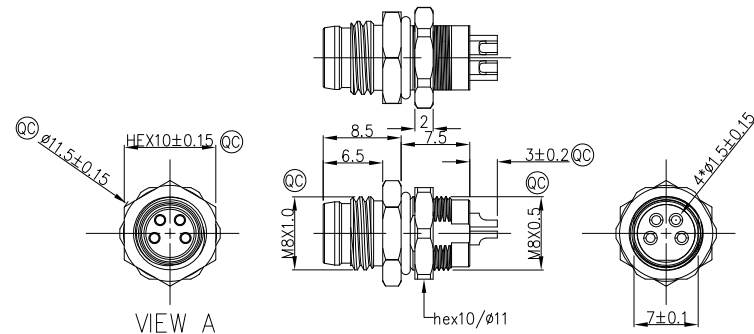

Connector locking system	Screw
Wiring type	Solder
Degree of protection	IP68(in mated condition)
Mechanical operation	> 100 mating cycles
Upper temperature	105°C
Lower temperature	-40°C
Pollution degree	3
Overvoltage categorie	II
Material group	II
Material of contact	CuZn (Messing/brass)
Contact plating	Au
Material of contact body	PA
Sealing	EPDM
Material of housing	Brass nickel plated

Ordering Information

FM8S 1 R03 2 26 3 - X 4 XX 5 P 6 1 7 04 8 W 9 00

1 Series Name - 2 Mounting thread - 3 Distinction No. - 4 Coded - 5 Circuits - 6 Contact
 FM8S-M8 Socket R03-rear fastened M8X0.5 26 A-A CODED 03-3Circuits 04-4Circuits P-Plug

7 Plating - 8 Thickness Plating - 9 Wire type
 1-Ep Au 04-0.1μm W-welding

Pin Assignments Front View	Rated Voltage	Rated impulse Voltage	Rated Current (40°C)	Contact resistance	Insulation resistance
	60V DC	1500V	4A	≤3mΩ	≥100MΩ
	60V DC	1500V	4A	≤3mΩ	≥100MΩ

 THIRD ANGLE PROJECTION DESIGN UNITS Metric SCALE 2:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.		ITEM NO.	 Building Technology Cornerstone REV 0 SHEET NO. 1/1
	X.±0.30	.X'±5'	FRANK	4/DEC/23	FM8SR0326-XXXP104W00		FM8SR0326	
	X.X±0.20	.X'±2'	CHECKED BY	DATE	TITLE			
	X.XX±0.15	.XX'±1'	CHERRY	4/DEC/23	M8X1.0 male socket rear fastened M8X0.5 Solder terminal [metal with section]			
X.XXX±0.10	.XXX'±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
LAM	4/DEC/23							