
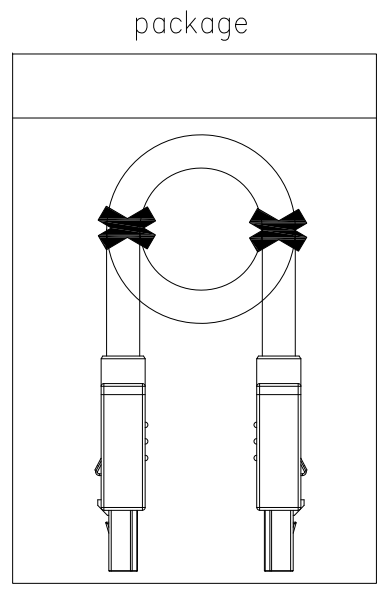


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
0		New Release	30/Nov/24		FRANK

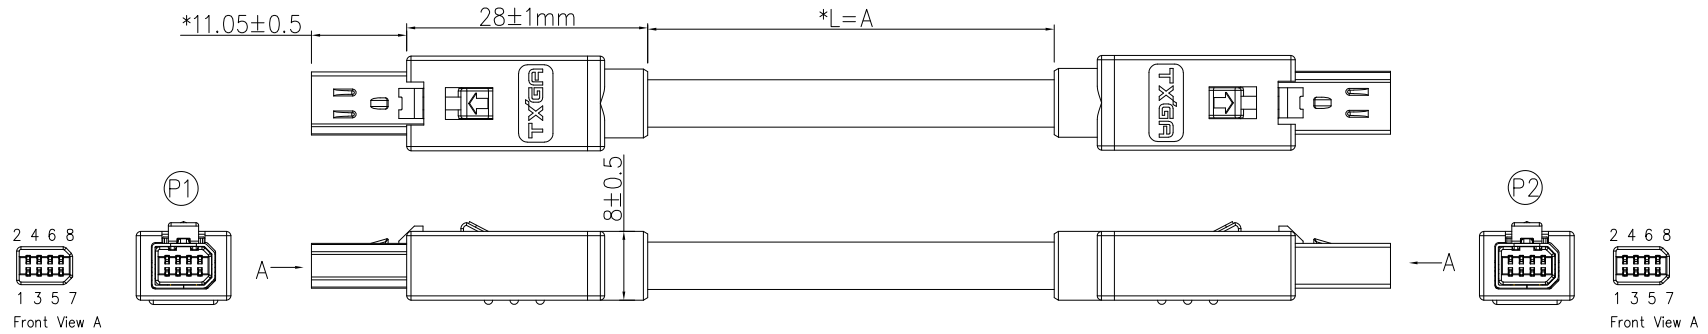

P1	P2	Colour
1	1	WH/OG
2	2	OG
3	3	WH/GN
6	6	GN

Length "A"	500 to 1000	1001 to 5000	5001 to 20000
Tolerance (mm)	±15	±20	±30

Ordering Information

$\frac{FMINI}{1}$ - $\frac{P}{2}$ $\frac{XX}{3}$ $\frac{D}{3}$ $\frac{ST}{4}$ $\frac{XXX}{5}$ - $\frac{000}{6}$

$\frac{1}{Series Name}$ - $\frac{2}{Type}$ $\frac{3}{Type}$ $\frac{4}{Type}$ $\frac{5}{Entry Angle}$ $\frac{6}{Cable}$ - $\frac{7}{Serial Number}$
 FMINI - P-Plug 40-Cat.4 D-D Shape ST-Straight XXX-length 000

TABLE 1

CABLE LENGTH (XXX)	005	010	015	020	025	030	035	040	045	050	200
L(M)	0.5M	1M	1.5M	2M	2.5M	3M	3.5M	4M	4.5M	5M	20M

ELECTRICAL
1. SHORT-CIRCUIT AND CONTINUITY TEST AT:DC 500V/0.1S
2. Conduction Impedance: 3Ω (Max)
3. Insulation Resistance: 10MΩ(Min)
PACKING SPECIFICATION
1.1pcs/Bundle,2PCS/Bag
2. "*" as the key size control
NOTES
1.This product must meet UL486A-1991mechanical performance
2.This product must meet 2011/65/EU ROHS compliance

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DATE	APPROVE BY	PART NO.	ITEM NO.	 Building Technology Cornerstone
	X.±.012(0.30)	X.±5'	FRANK	30/Nov/24	FMINI-P40DSTXXX-000	FMINI	
DESIGN UNITS Metric	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
	X.XX±.006(0.15)	.XX±1'	CHERRY	30/Nov/24	MINI 10 D-shape plug double ended		
SCALE NT	SIZE A4	X.XXX±.004(0.10)	.XXX±0.5'	DRAWN BY DANIEL	DATE 30/Nov/24	REV 0	SHEET NO. 1/1