


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
0		New Release	25/APR/24	LIN	FRANK

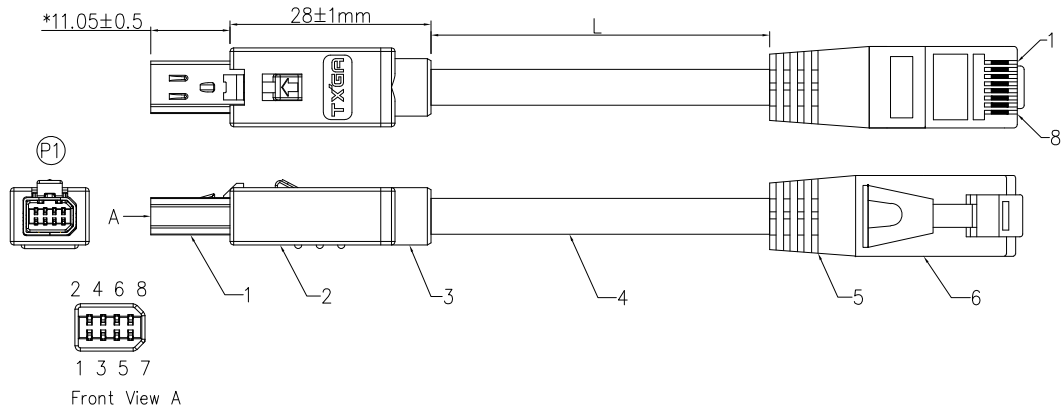

- Note:
- ① Important Dimension
 - This product must meet IEC 61076-3-122
 - This product must meet 2011/65/EU ROHS compliance.
 - Not note tolerances: ±0.20
 - Rated voltage: 60V, Rated current 0.5A
 - Temperature range: -40°C~+80°C
 - Data rate: 1000MB/S
 - Wire Size(mm²)/AWG: 0.14mm²/26AWG
 - Flame test: UL94V-0

Dimensions L (mm)				
Range(length)	50 to 200	201 to 1000	1001 to 5000	5000 to 9000
Tolerance(mm)	±15	±30	±50	±100

Ordering Information



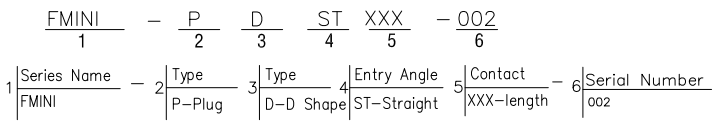


TABLE 1

CABLE LENGTH (XXX) L(M)	005	010	015	020	025	030
	0.5M	1M	1.5M	2M	2.5M	3M
	035	040	045	050	200
	3.5M	4M	4.5M	5M	20M

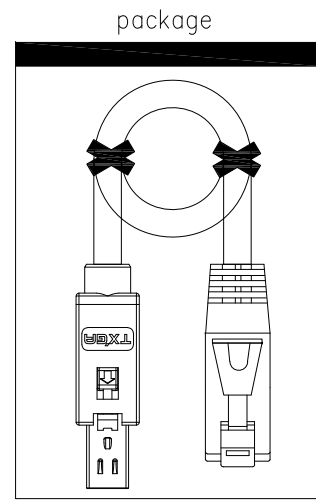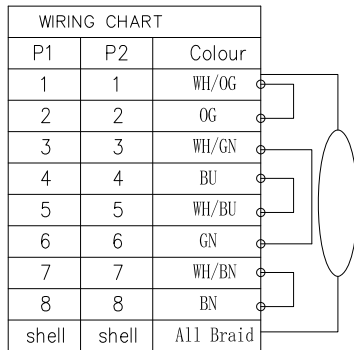

* Note: All Materials Meet The "RoHs" !

NO.	SPECIFICATION	DESCRIPTION	NOTE
6	Connector	RJ45 8P8C	1PC
5	Overmolde	PVC 30P	black
4	Cable	SF/UTP 4P*26AWG jacket PVC OD6.0	black
3	Overmold	PVC 30P	black
2	Body	Mini IO Body black	1PC
1	Connector	Mini IO D shape	1PC

ELECTRICAL
1. SHORT-CIRCUIT AND CONTINUITY TEST AT:DC 300V/0.1S
2. Conduction Impedance: 2Ω (Max)
3. Insulation Resistance: 10MΩ(Min)
PACKING SPECIFICATION
1.1pcs/Bundle,1PCS/Bag
2. "*" as the key size control
NOTES
1.This product must meet UL486A-1991mechanical performance
2.This product must meet 2011/65/EU ROHS compliance

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DATE	APPROVE BY	PART NO.	ITEM NO.	 Building Technology Cornerstone
	X.±0.30	.X'±5'	FRANK	25/APR/24	FMINI-PDSTXXX-002	FMINI	
DESIGN UNITS Metric	X.X±0.20	.X'±2'	CHECKED BY	DATE	TITLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
SCALE NT	X.XX±0.15	.XX'±1'	CHERRY	25/APR/24	MINI IO D-shape plug to RJ45 Cable		
SIZE A4	X.XXX±0.10	.XXX'±0.5'	DRAWN BY	DATE			REV 0 SHEET NO. 1/1
			DANIEL	25/APR/24			