
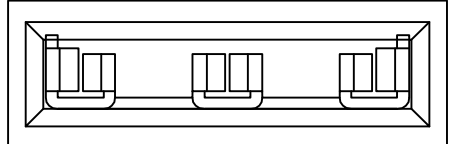
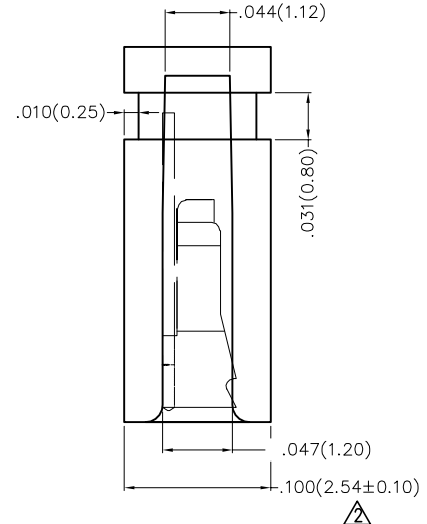


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	1. Corrected the material of the Housing 2. Structural changes	15/SEP/21	KATE	CHERRY
2	△	Update dimensions	19/MAR/26	MATT	LEO

SPECIFICATIONS

Electrical  
 Current Rating: 3A AC(rms)/DC  
 Insulation Resistance: 1000 MΩ Min.  
 Withstanding Voltage: 500V AC r.m.s  
 Temperature Range—Operating: -40°C~+105°C

Material and Plating  
 △ Housing: PBT (UL 94V-0) Black  
 Contacts: Phosphor bronze  
 Plating: Tin plated

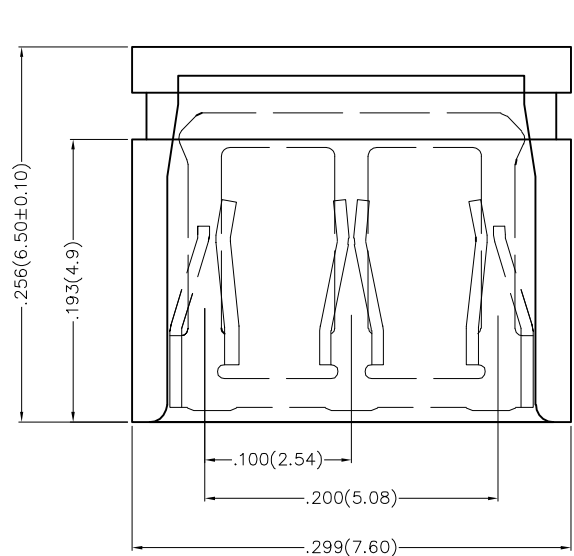

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 14/JUL/17	PART NO. FMJ50801-013K6B	ITEM NO. FMJ50801	 Building Technology Cornerstone	
	DESIGN UNITS Inch (metric)	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 14/JUL/17	TITLE Mini jumper 5.08mm (Closed)		REV 2
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1'	DRAWN BY KATE	DATE 14/JUL/17	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
		X.XXX±.004(0.10)	.XXX'±0.5'					