

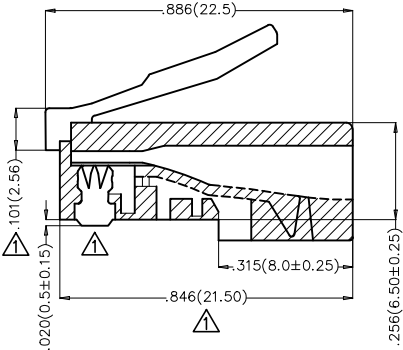
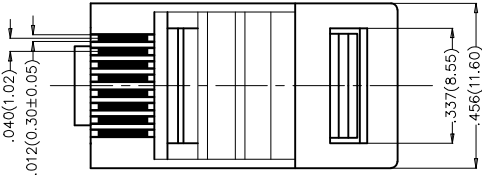


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Size change	02/AUG/19	KATE	CHERRY

Specifications

Current Rating: 3A AC(rms)/DC
Insulation Resistance: 500M Ω Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C
Materials
Contact Material: Polycarbonate
Contact Plating: Half/Gold Plating

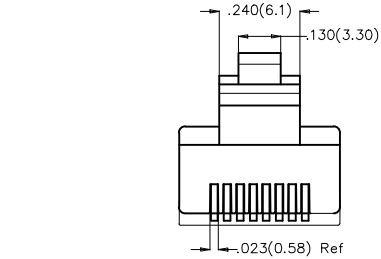

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FMP02-103B	ITEM NO. FMP02	 Leader Of Industry	
	X.±.012(0.30)	X'.±5"	CHECKED BY CHERRY	DATE 25/JUN/13	TITLE 8P8C MODULAR PLUG			
	DESIGN UNITS Inch (metric)		X.X±.008(0.20)	X".±2"	DRAWN BY JACOB	DATE 25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	SCALE 5:1	SIZE A4	X.XX±.006(0.15)	X.X".±1"			REV 1	SHEET NO. 1/1
		X.XXX±.004(0.10)	X.XX".±0.5"					