

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	⚠	Terminal structure change	11/AUG/23	MATT	LEO


SPECIFICATIONS

Electrical

Current Rating: 2A AC(rms)/DC
Voltage Rating: 40V AC(rms)/DC
Contact Resistance: 35 mΩ Max
Insulation Resistance: 500 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: −40°C to +105°C

Material and Plating

Contact Material: Copper alloy/ Gold plated
Shell: Copper alloy/ Nickel plated

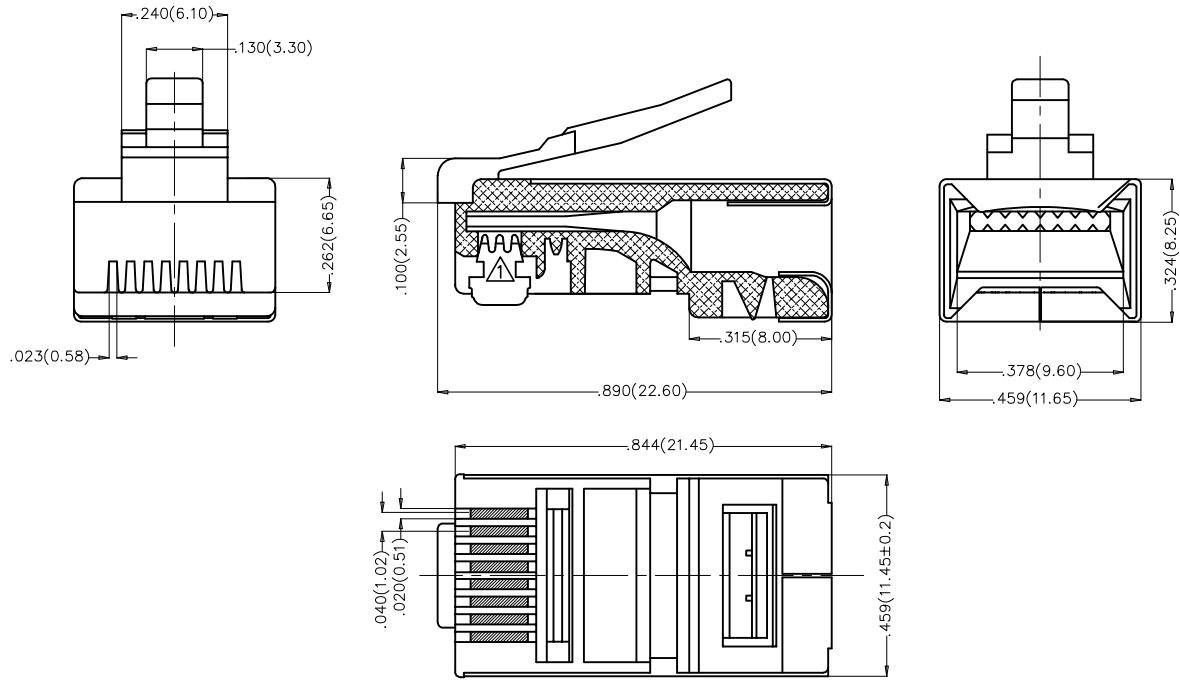

Ordering Information

FMP 04 — 1 XX B
1 2 3 4 5

1	Category FMP—Modular Plug	2	Distinction No. 04	3	Plating 1—Gold Plated	4	Thickness of Plating 00—Gold Flash 03—3u" Custom Plate Available	6	Packaging B—Bag
---	------------------------------	---	-----------------------	---	--------------------------	---	---	---	--------------------

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FMP04-1XXB	ITEM NO. FMP04	 Leader Of Industry		
	X.±.012(0.30) X.±5'		CHECKED BY	DATE	TITLE 8P8C MODULAR PLUG				
	X.X±.008(0.20) .X'±2'		CHERRY	25/JUN/13			REV 1	SHEET NO. 1/1	
	X.XX±.006(0.15) .XX±1'		DRAWN BY	DATE			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
X.XXX±.004(0.10) .XXX±0.5'		JACOB	25/JUN/13						
DESIGN UNITS Inch (metric)									
SCALE 5:1	SIZE A4								