

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Size change	04/AUG/23	MATT	LEO

SPECIFICATIONS

Electrical

Current Rating: 2A AC(rms)/DC

Voltage Rating: 40V AC(rms)/DC

Contact Resistance: 35 mΩ Max

Insulation Resistance: 500 MΩ MIN


Withstanding Voltage: 500V AC r.m.s

Temperature Range—Operating: −40°C to +105°C

Material and Plating

Housing: Polycarbonate, UL94V-0

Contact: Brass/ Gold-Flash /Gold Plated Options

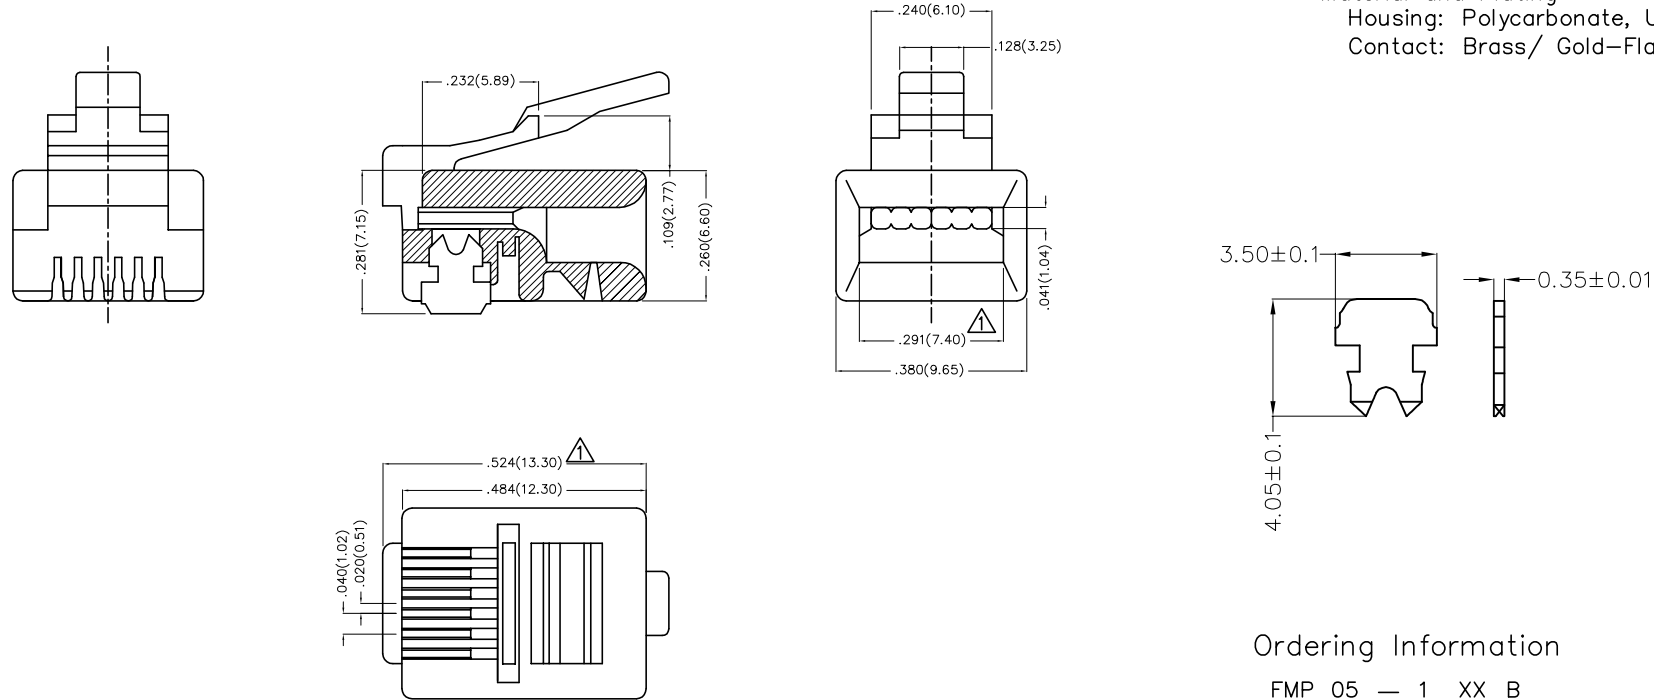

Ordering Information

FMP 05 — 1 XX B
1 2 3 4 5

1	Category FMP—Modular Plug	2	Distinction No. 05	3	Plating 1—Gold Plated	4	Thickness of Plating 00—Gold Flash 03—3u" Custom Plate Available	6	Packaging B—Bag
---	------------------------------	---	-----------------------	---	--------------------------	---	---	---	--------------------

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FMP05-1XXB	ITEM NO. FMP05	 Leader Of Industry	
		X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 25/JUN/13	TITLE 6P6C MODULAR PLUG			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X'±2'	DRAWN BY JACOB	DATE 25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 1	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1'		DATE 25/JUN/13				
		X.XXX±.004(0.10)	.XXX'±0.5'						

TXGA
Leader Of Industry

REV 1 SHEET NO. 1/1