


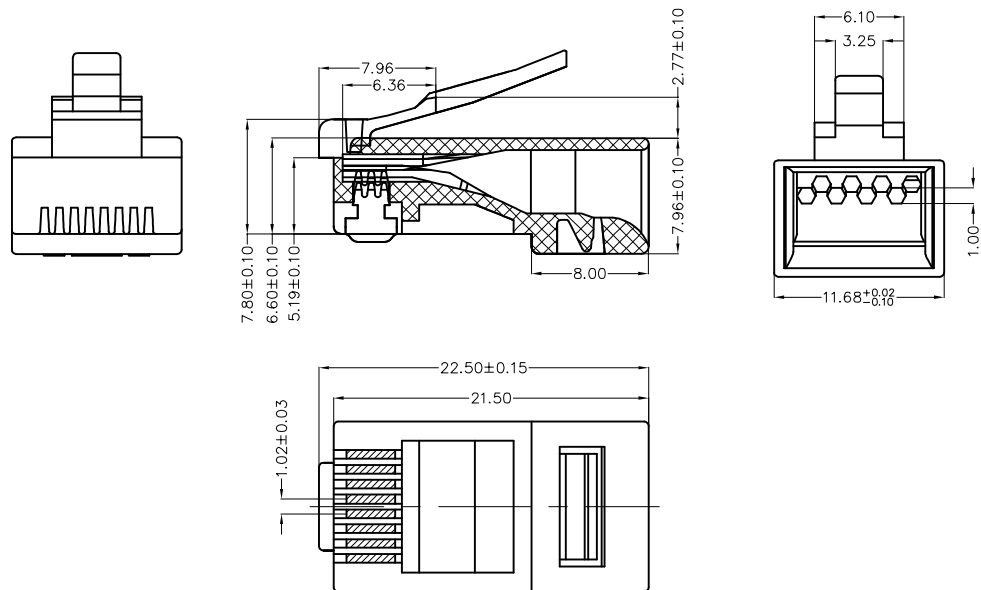

SPECIFICATIONS

Electrical
Current Rating: 2A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 30 mΩ Max
Insulation Resistance: 500 MΩ MIN
Withstanding Voltage: 1000V AC r.m.s
Temperature Range-Operating: -40°C ~ +80°C

Mechanical
Durability: 750 cycles Min.
Mating & unmating force: 20N Max

Material and Plating
Housing: PC (UL94V-0)
Contact: Copper alloy/ Gold plated / Gold on contact, bright tin on tail

Ordering Information

FMP 12 - X XX B
1 2 3 4 5

1	Category FMP-Modular Plug	2	Distinction No. 11	3	Plating 1-Gold Plated 3-Gold on contact, bright tin on tail	4	Thickness of Plating 00-Gold flash 01-1μ" Custom plate available	6	Packaging B-Bag
---	------------------------------	---	-----------------------	---	--	---	---	---	--------------------

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 29/NOV/21	PART NO. FMP12-XXXB	ITEM NO. FMP12	 Leader Of Industry	
		X. ±0.30	X.* ±5°	CHECKED BY CHERRY	DATE 29/NOV/21	TITLE 8P8C MODULAR PLUG			
DESIGN UNITS Metric		X.X ±0.20	X.X* ±2°		DRAWN BY MATT			DATE 29/NOV/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°						
		X.XXX ±0.10	X.XXX* ±0.5°						
							REV 0	SHEET NO. 1/1	