


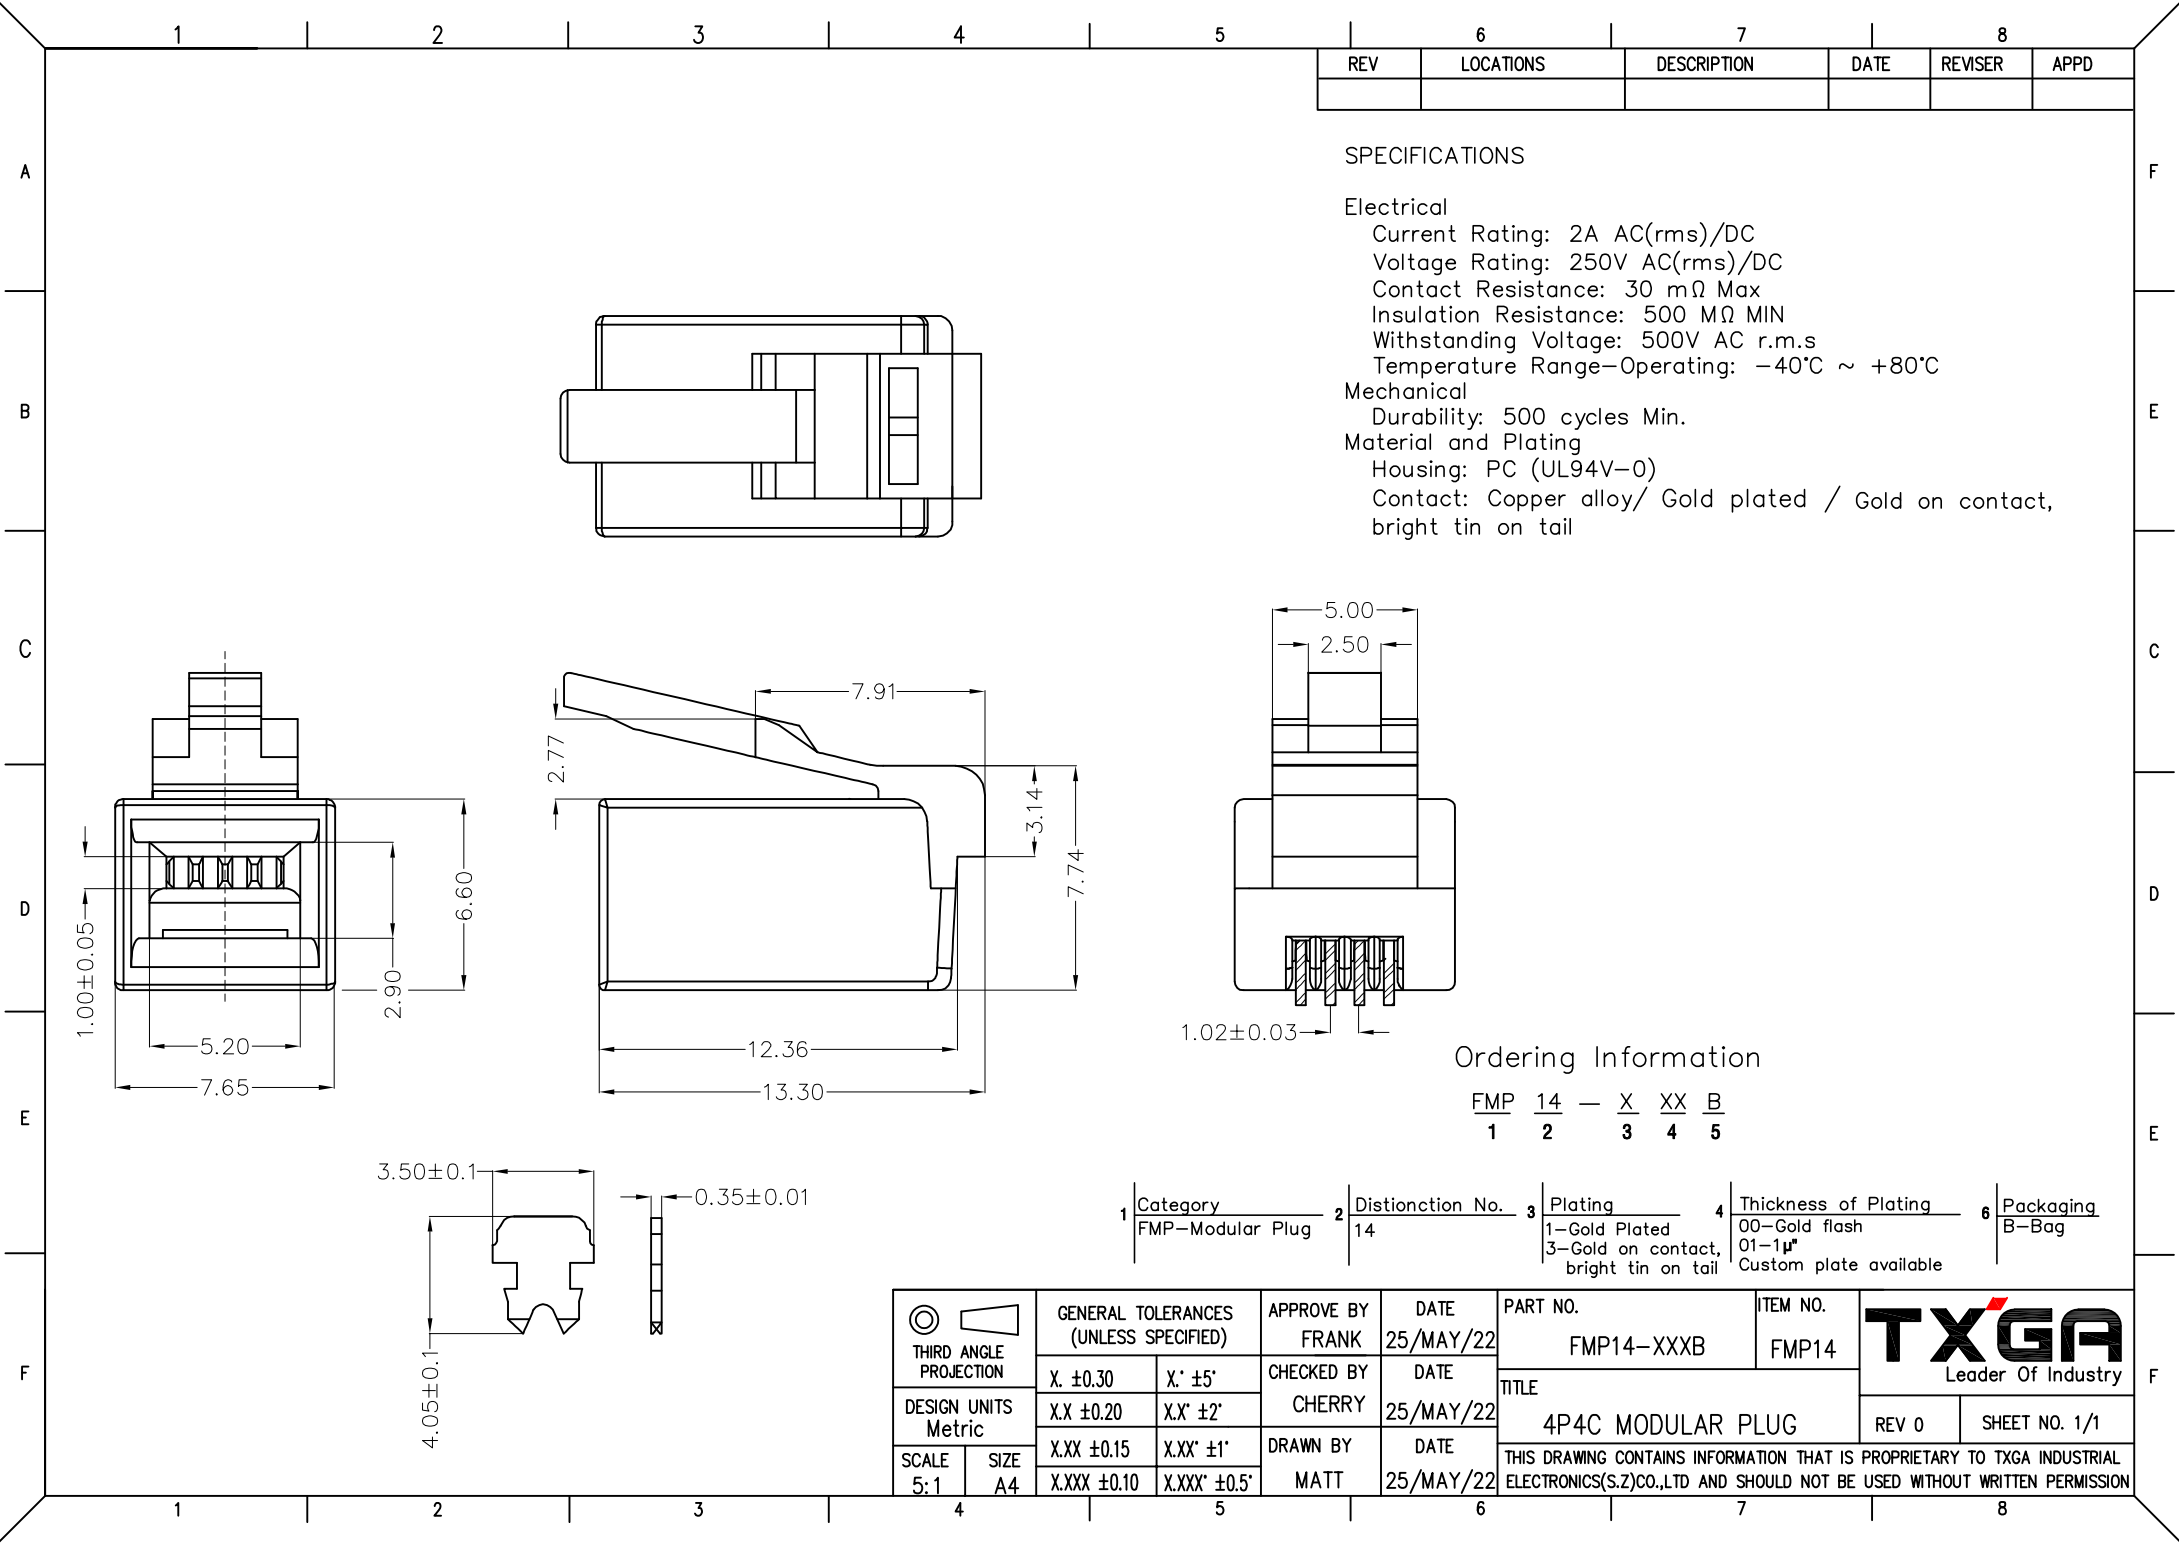

SPECIFICATIONS

Electrical

- Current Rating: 2A AC(rms)/DC
- Voltage Rating: 250V AC(rms)/DC
- Contact Resistance: 30 mΩ Max
- Insulation Resistance: 500 MΩ MIN
- Withstanding Voltage: 500V AC r.m.s
- Temperature Range—Operating: -40°C ~ +80°C

Mechanical

- Durability: 500 cycles Min.

Material and Plating

- Housing: PC (UL94V-0)
- Contact: Copper alloy/ Gold plated / Gold on contact, bright tin on tail

Ordering Information

FMP 14 — X XX B
1 2 3 4 5

1	Category FMP—Modular Plug	2	Distinction No. 14	3	Plating 1—Gold Plated 3—Gold on contact, bright tin on tail	4	Thickness of Plating 00—Gold flash 01—1μ" Custom plate available	6	Packaging B—Bag
---	------------------------------	---	-----------------------	---	--	---	---	---	--------------------

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK		DATE 25/MAY/22		PART NO. FMP14-XXXB		ITEM NO. FMP14		 Leader Of Industry			
DESIGN UNITS Metric		X. ±0.30	X.' ±5'	CHECKED BY CHERRY	DATE 25/MAY/22	TITLE 4P4C MODULAR PLUG				REV 0				SHEET NO. 1/1	
		X.X ±0.20	X.X' ±2'												
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
		X.XXX ±0.10	X.XXX' ±0.5'	MATT	25/MAY/22										
4		5		6		7		8							