


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION
Electrical Performance
 Current Rating: 1.5A AC(rms)/DC
 Voltage Rating: 125V AC(rms)/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 500MΩ MIN
 Withstanding Voltage: 1000V AC r.m.s
 Temperature Range—Operating: -40°C~+85°C
Material and Plating
 Housing: PC, (UL 94V-0), Clear
 T Series: PC, (UL 94V-0), Clear
 Terminal: Brass/Selective gold plated on contact area and matte tin plated on tails area

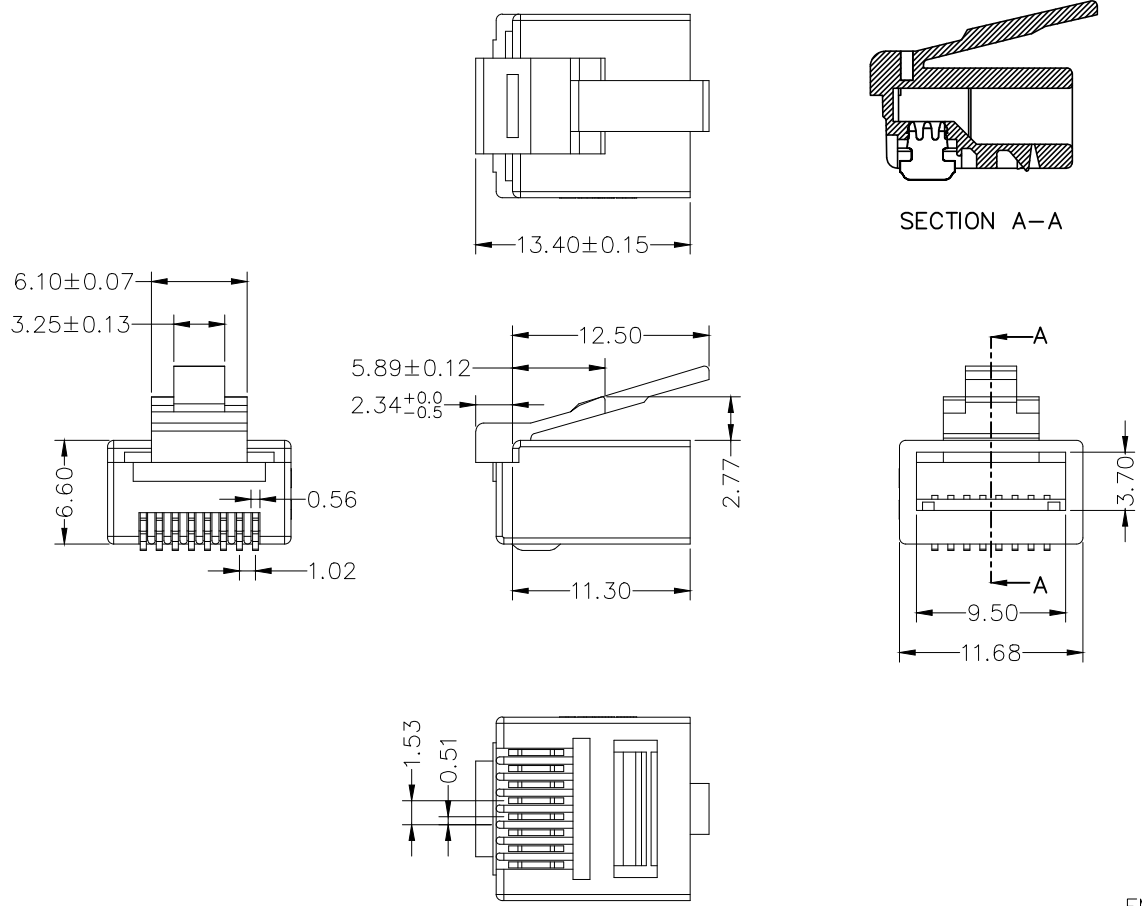

Ordering Information

FMP 25 - 7 XX B
 1 2 3 4 5

1	Category FMP—Modular Plug	2	Distinction No. 25	3	Plating 7—Selective gold plated on contact area and matte tin plated on tails area	4	thickness of Gold Plating 00—Gold flash 06—6u" 01—1u" 15—15u" 03—3u" 30—30u" 50—50u"	5	Packaging B—Bag
---	------------------------------	---	-----------------------	---	---	---	--	---	--------------------

<p>THIRD ANGLE PROJECTION</p>	<p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p>		<p>APPROVE BY LEO</p>	<p>DATE 19/Sept/23</p>	<p>PART NO. FMP25-7XXB</p>	<p>ITEM NO. FMP25</p>	<p>Building Technology Cornerstone</p>
	<p>DESIGN UNITS mm</p>	<p>X. ±0.30 X.* ±5*</p>	<p>CHECKED BY GISELLE</p>	<p>DATE 19/Sept/23</p>	<p>TITLE CAT6 8P8C Modular Plug (2 Assemblies)</p>		
<p>SCALE 5:1</p>	<p>SIZE A4</p>	<p>X.XX ±0.15 X.XX* ±1*</p>	<p>DRAWN BY Hejianpeng</p>	<p>DATE 19/Sept/23</p>	<p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p>		