

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Update structure and dimensions	07/MAR/24	MATT	LEO

A





B

C

D


E

F

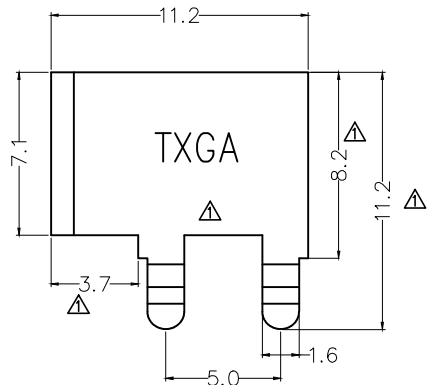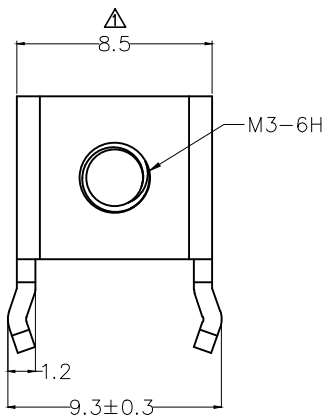

SPECIFICATIONS

Electrical
 Current Rating: 40A Max △
 Screw Torque: 0.5Nm
 Operating Temperature: -40°C~+120°C
 Material And Plating
 Brass/Tin Plated

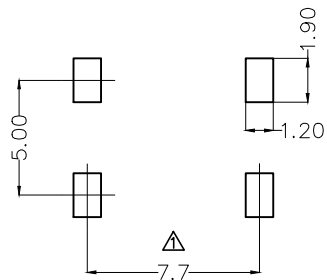

Recommended P.C.Board Layout
 Tolerance: ±0.05

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JAN/23	PART NO. FNT011-M030B	ITEM NO. FNT011	<p>Building Technology Cornerstone</p>	
	X. ±0.30	X.* ±5°	CHECKED BY GISELLE	DATE 30/JAN/23	TITLE Nut-type Terminal (M3) With Screw			
DESIGN UNITS METRIC(mm)	X.X ±0.20	X.X* ±2°	DRAWN BY YYQ	DATE 30/JAN/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX ±0.15						
		X.XXX ±0.10						

1 2 3 4 5 6 7 8