

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Size Change	20180628	Kate	Cherry

SPECIFICATIONS


Electrical

Current Rating: 3A AC(rms)/DC
Voltage Rating: 12V AC(rms)/DC
Contact Resistance: 30mΩ Max.
Insulation Resistance: 100 MΩ Min
Dielectric Withstanding Voltage: 100V AC r.m.s
Temperature Range—Operating: -30°C~+85°C

Material and Plating

Plunger: Brass/ 1μ" Gold plated over nickel
Barrel: Brass/ 1μ" Gold plated over nickel
Spring: SUS

Packaging: 500 pcs/Bag

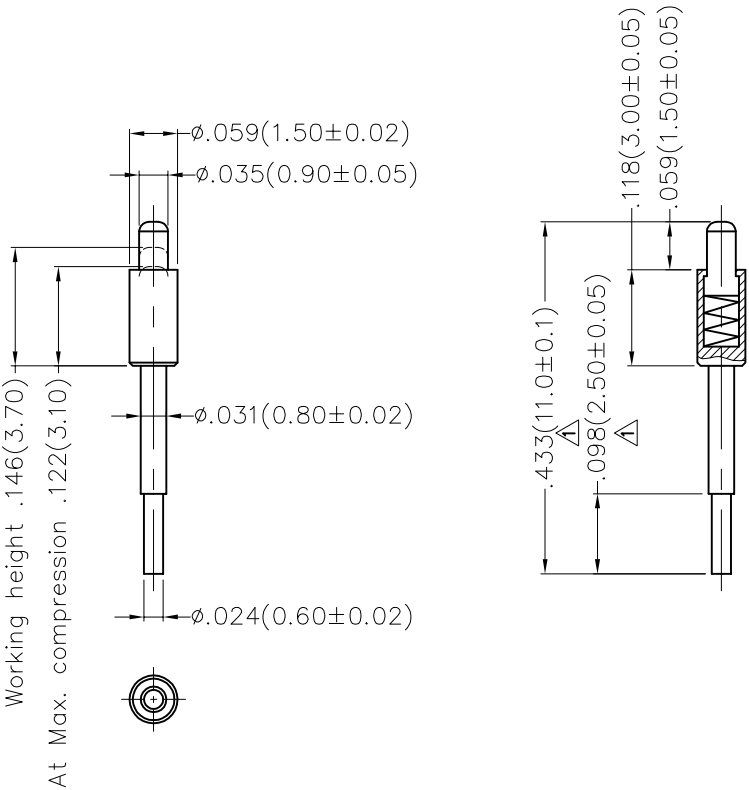

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Leader Of Industry</p>	
	X.±.012(0.30)	X.±5°	FRANK	15/MAY/18	FPG00011-001S1010B	FPG00011		
	DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2°	CHECKED BY	DATE	TITLE		<p>POGO PIN</p>
	SCALE	X.XX±.006(0.15)	.XX'±1°	CHERRY	15/MAY/18	REV 1	SHEET NO. 1/1	
1:1	X.XXX±.004(0.10)	.XXX'±0.5°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
A4			KATE	15/MAY/18				