

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Size Change	20180628	Kate	Cherry
2		Add the chamfering	20180713	Kate	Cherry

SPECIFICATIONS

Electrical

Current Rating: 0.5A AC(rms)/DC
Voltage Rating: 12V AC(rms)/DC
Contact Resistance: 30mΩ Max.
Dielectric Withstanding Voltage: 100V AC r.m.s


Material and Plating

Plunger: Brass/ Gold flash over nickel
Barrel: Brass/ Gold flash over nickel
Spring: SUS/Gold flash over nickel

4.Mechanical

Spring force: 100g±20% at normal working height

Packaging: 1000 pcs/Bag

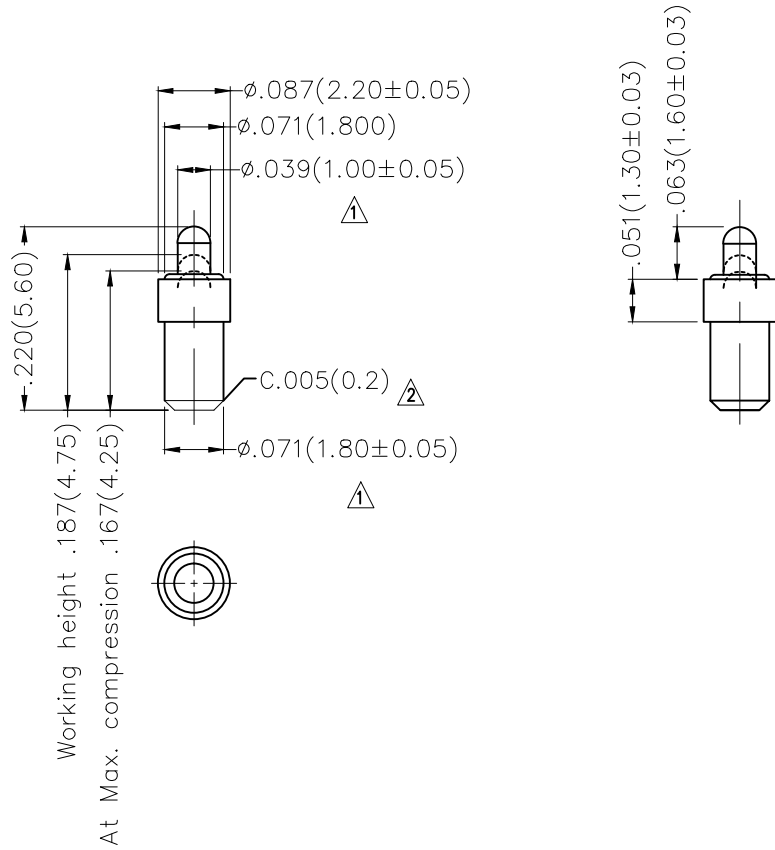

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 15/MAY/18	PART NO. FPG00012-001S1000B	ITEM NO. FPG00012	 TXGA Leader Of Industry	
	DESIGN UNITS Inch (metric)	$X \pm .012(0.30)$ $X.X \pm .008(0.20)$ $X.XX \pm .006(0.15)$ $X.XXX \pm .004(0.10)$	$X \pm .5'$ $.X \pm 2'$ $.XX \pm 1'$ $.XXX \pm 0.5'$	CHECKED BY KATE	DATE 15/MAY/18	TITLE POGO PIN		REV 2
SCALE 1:1	SIZE A4		DRAWN BY CHERRY	DATE 15/MAY/18	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			SHEET NO. 1/1