

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical


Current Rating: 2.0A AC(rms)/DC
 Voltage Rating: 12V AC(rms)/DC
 Contact Resistance: 20mΩ Max.
 Temperature Range—Operating: -55°C~+125°C

Mechanical

Durability: 10,000 cycles Min.

Material and Plating

Plunger: Brass/ 20μ" Gold plated over nickel
 Barrel: Brass/ 20μ" Gold plated over nickel
 Spring: Beryllium copper/ 10μ" Gold plated over nickel

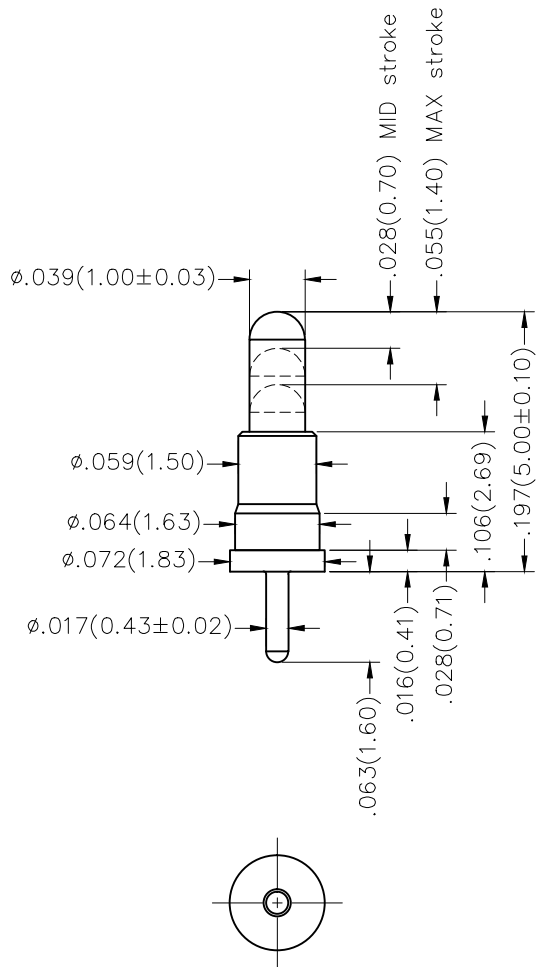

A

B

C

D

E

F

A

B

C

D

E

F

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 31/MAY/18	PART NO. FPG00013-001S1200B	ITEM NO. FPG00013	<p>Leader Of Industry</p>	
	DESIGN UNITS Inch (metric)	$\pm.002(0.05)$	$\pm 1'$	CHECKED BY CHERRY	DATE 31/MAY/18	TITLE POGO PIN		REV 0
SCALE 5:1	SIZE A4	DRAWN BY KATE		DATE 31/MAY/18	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

1 2 3 4 5 6 7 8