
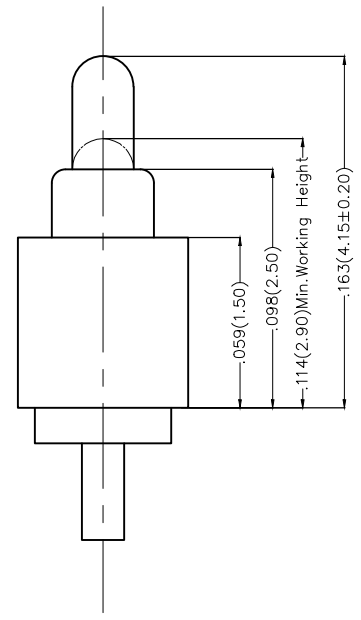
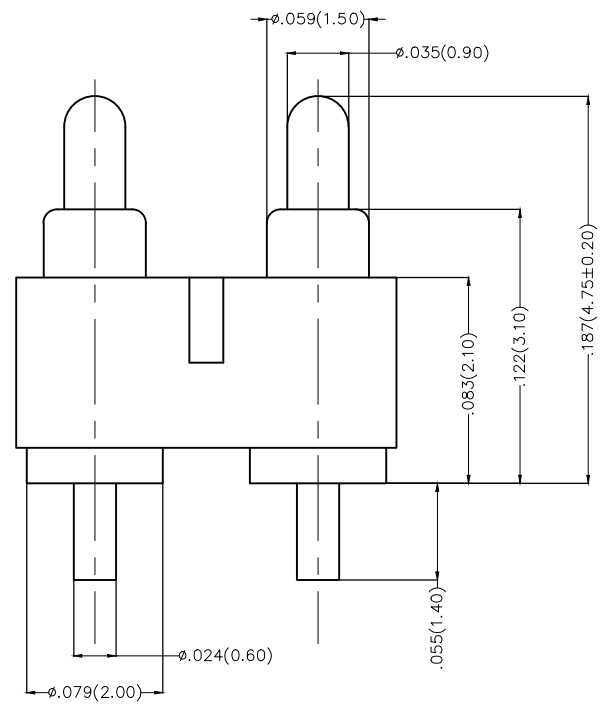


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

**SPECIFICATIONS**

Electrical  
 Current Rating: 1.0A AC(rms)/DC  
 Voltage Rating: 12V AC(rms)/DC  
 Contact Resistanc: 50 mΩ Max  
 Durability: 10,000 cycles(minimum)  
 Material and Plating  
 Plunger: Brass/Gold Plated  
 Barrel: Brass/Gold Plated  
 Spring: SUS /Gold Plated  
 Housing: PA46 Black

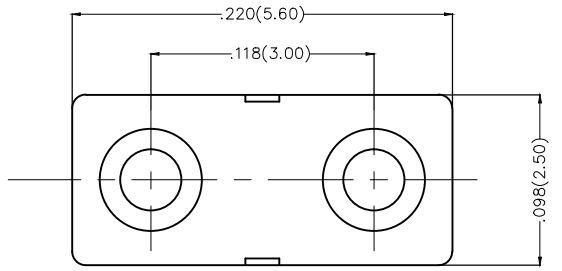

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 20/JUL/17	PART NO. FPG30005-S02S1016B	ITEM NO. FPG30005	 Leader Of Industry
	X.X±.012(0.30)	.X'±5'	CHECKED BY CHERRY	DATE 20/JUL/17	TITLE Pogo Pin		
DESIGN UNITS Inch (metric)	X.XX±.008(0.20)	.X'±2'	DRAWN BY LXF	DATE 20/JUL/17	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XX'±1'				