

Dimensions(in/mm)	
H	F
.039(1.00)	.059(1.50)~.069(1.75)
.059(1.50)	≥.079(2.00)

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Structure of Housing change	08/MAR/23	MATT	KATE




SPECIFICATIONS

Electrical

Current Rating: 1.0A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 20 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 300V AC r.m.s
Temperature Range—Operating: -40°C~+105°C

Material

Housing: Glass Filled Polyester (UL 94V-0), Color: Black
Pin: Brass
Pin Plating: Gold plated/ Selective gold plated on contact area and 120μ" Min. matte tin plated on tails area

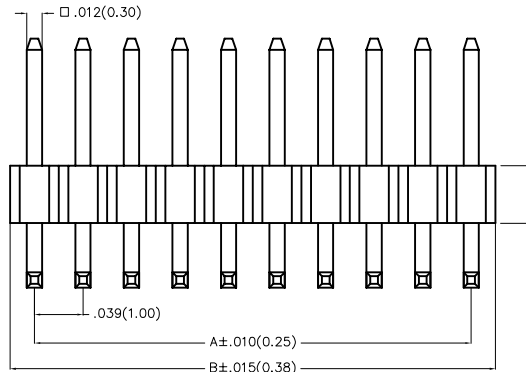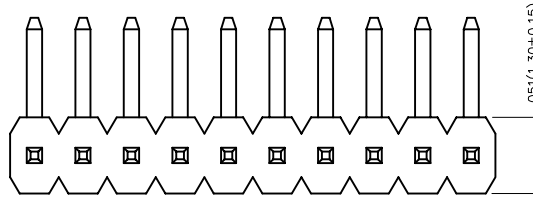


Ordering Information

FPH 100 27 - S XX B X XX 4 XX XX XX B
1 2 3 4 5 6 7 8 9 10 11 12 13

1 Category FPH-Pin Header	2 Series Number 100-Pitch1.00mm	3 Distinction No. 27	4 Row Option S-Single Row	5 Circuits XX	6 Entry Angle B-90° Angle	7 Plating 1-Gold plated 7-Selective gold plated on contact area and matte tin plated on tails area
------------------------------	------------------------------------	-------------------------	------------------------------	------------------	------------------------------	--

8 Thickness of Plating 01-1μ" 15-15μ" Custom plate available	9 Material-Resin 4-PA6T	10 E Size 01,02...-Serial number (See Table1)	11 F Size 01,02...-Serial number (See Table1)	12 G Size 01,02...-Serial number (See Table1)	13 Packaging B-PE Bag
---	----------------------------	---	---	---	--------------------------



Recommended P.C.Board Layout

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 26/DEC/19	PART NO. FPH10027-SXXBXXX4XXXXXB	ITEM NO. FPH10027	 Building Technology Cornerstone
	DESIGN UNITS Inch (metric)	X±.012(0.30) X'±5'	CHECKED BY CHERRY	DATE 26/DEC/19	TITLE Board to Board(Pin Header) Pitch 1.00mm 90° Angle(DIP)		
SCALE 5:1	SIZE A4	X.XX±.006(0.15) .XX'±1'	DRAWN BY ZOEY	DATE 26/DEC/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
		X.XXX±.004(0.10) .XXX'±0.5'					


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Table1

Serial number	Dimensions (in/mm) E	Serial number	Dimensions (in/mm) E
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		

Serial number	Dimensions (in/mm) F	Serial number	Dimensions (in/mm) F
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		

Serial number	Dimensions (in/mm) G	Serial number	Dimensions (in/mm) G
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		



<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 26/DEC/19	PART NO. FPH10027-SXXBXXX4XXXXXXB	ITEM NO. FPH10027	<p>Building Technology Cornerstone</p>	
	X.±.012(0.30)	X'±5'	CHECKED BY CHERRY	DATE 26/DEC/19	TITLE Board to Board(Pin Header) Pitch 1.00mm 90° Angle(DIP)			REV 1
	DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	DRAWN BY ZOEY	DATE 26/DEC/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 2/3
	SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1'				
		X.XXX±.004(0.10)	.XXX'±0.5'					



1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVSER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
1	FPH10027-S01BXXX4XXXXXXB	 	.039(1.00)	21	FPH10027-S21BXXX4XXXXXXB	.787(20.00)	.827(21.00)
2	FPH10027-S02BXXX4XXXXXXB	.039(1.00)	.079(2.00)	22	FPH10027-S22BXXX4XXXXXXB	.827(21.00)	.866(22.00)
3	FPH10027-S03BXXX4XXXXXXB	.079(2.00)	.118(3.00)	23	FPH10027-S23BXXX4XXXXXXB	.866(22.00)	.906(23.00)
4	FPH10027-S04BXXX4XXXXXXB	.118(3.00)	.157(4.00)	24	FPH10027-S24BXXX4XXXXXXB	.906(23.00)	.945(24.00)
5	FPH10027-S05BXXX4XXXXXXB	.157(4.00)	.197(5.00)	25	FPH10027-S25BXXX4XXXXXXB	.945(24.00)	.984(25.00)
6	FPH10027-S06BXXX4XXXXXXB	.197(5.00)	.236(6.00)	26	FPH10027-S26BXXX4XXXXXXB	.984(25.00)	1.024(26.00)
7	FPH10027-S07BXXX4XXXXXXB	.236(6.00)	.276(7.00)	27	FPH10027-S27BXXX4XXXXXXB	1.024(26.00)	1.063(27.00)
8	FPH10027-S08BXXX4XXXXXXB	.276(7.00)	.315(8.00)	28	FPH10027-S28BXXX4XXXXXXB	1.063(27.00)	1.102(28.00)
9	FPH10027-S09BXXX4XXXXXXB	.315(8.00)	.354(9.00)	29	FPH10027-S29BXXX4XXXXXXB	1.102(28.00)	1.142(29.00)
10	FPH10027-S10BXXX4XXXXXXB	.354(9.00)	.394(10.00)	30	FPH10027-S30BXXX4XXXXXXB	1.142(29.00)	1.181(30.00)
11	FPH10027-S11BXXX4XXXXXXB	.394(10.00)	.443(11.00)	31	FPH10027-S31BXXX4XXXXXXB	1.181(30.00)	1.220(31.00)
12	FPH10027-S12BXXX4XXXXXXB	.443(11.00)	.472(12.00)	32	FPH10027-S32BXXX4XXXXXXB	1.220(31.00)	1.260(32.00)
13	FPH10027-S13BXXX4XXXXXXB	.472(12.00)	.512(13.00)	33	FPH10027-S33BXXX4XXXXXXB	1.260(32.00)	1.130(33.00)
14	FPH10027-S14BXXX4XXXXXXB	.512(13.00)	.551(14.00)	34	FPH10027-S34BXXX4XXXXXXB	1.130(33.00)	1.339(34.00)
15	FPH10027-S15BXXX4XXXXXXB	.551(14.00)	.591(15.00)	35	FPH10027-S35BXXX4XXXXXXB	1.339(34.00)	1.379(35.00)
16	FPH10027-S16BXXX4XXXXXXB	.591(15.00)	.630(16.00)	36	FPH10027-S36BXXX4XXXXXXB	1.379(35.00)	1.417(36.00)
17	FPH10027-S17BXXX4XXXXXXB	.630(16.00)	.669(17.00)	37	FPH10027-S37BXXX4XXXXXXB	1.417(36.00)	1.457(37.00)
18	FPH10027-S18BXXX4XXXXXXB	.669(17.00)	.709(18.00)	38	FPH10027-S38BXXX4XXXXXXB	1.457(37.00)	1.497(38.00)
19	FPH10027-S19BXXX4XXXXXXB	.709(18.00)	.748(19.00)	39	FPH10027-S39BXXX4XXXXXXB	1.497(38.00)	1.535(39.00)
20	FPH10027-S20BXXX4XXXXXXB	.748(19.00)	.787(20.00)	40	FPH10027-S40BXXX4XXXXXXB	1.535(39.00)	1.575(40.00)

A
B
C
D
E
F

A
B
C
D
E
F

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 26/DEC/19	PART NO. FPH10027-SXXBXXX4XXXXXXB	ITEM NO. FPH10027	 Building Technology Cornerstone	
	DESIGN UNITS Inch (metric)	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 26/DEC/19	TITLE Board to Board(Pin Header) Pitch 1.00mm 90° Angle(DIP)		REV 1
	SCALE 5:1	X.XX±.006(0.15)	.XX±1'	DRAWN BY ZOEY	DATE 26/DEC/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	SIZE A4	X.XXX±.004(0.10)	.XXX±0.5'					

1 2 3 4 5 6 7 8