


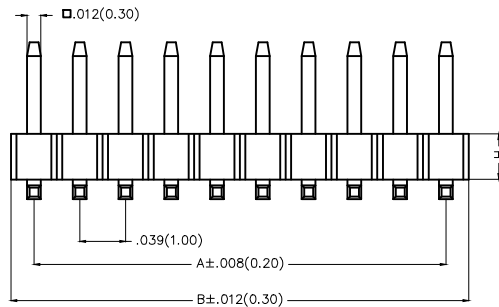


1	2	3	4	5	6	7	8
Dimensions(in/mm)					REV	LOCATIONS	DESCRIPTION
H	F				DATE	REVISER	APPD
.039(1.00)	.059(1.50)~.069(1.75)						
.059(1.50)	≥.079(2.00)						

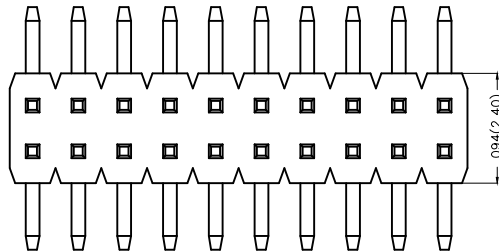

Recommended P.C.Board Layout

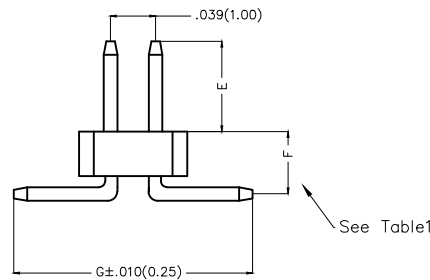

SPECIFICATIONS

Electrical

Current Rating:1.0A AC(rms)/DC
Voltage Rating:250V AC(rms)/DC
Contact Resistance:20 mΩ Max
Insulation Resistance:1000 MΩ Min
Withstanding Voltage:300V AC r.m.s
Temperature Range—Operating:—40°C~+105°C

Material

Housing:Glass Filled Polyester (UL 94V-0), Color: Black
Pin:Brass
Pin Plating: Gold plated/ Selective gold plated on contact area and 120μ" Min. matte tin plated on tails area

Ordering Information

FPH 100 32 — D XX S X XX 4 XX XX XX M
1 2 3 4 5 6 7 8 9 10 11 12 13

1	<u>Category</u> FPH—Pin Header	2	<u>Series Number</u> 100—Pitch1.00mm	3	<u>Distinction No.</u> 32	4	<u>Row Option</u> D—Double Row	5	<u>Circuits</u> XX	6	<u>Entry Angle</u> S—180° Vertical	7	<u>Plating</u> 1—Gold plated 7—Selective gold plated on contact area and matte tin plated on tails area
8	<u>Thickness of Plating</u> 01—1μ" 15—15μ" Custom plate available	9	<u>Material—Resin</u> 4—PA6T	10	<u>E Size</u> 01,02...—Serial number (See Table1)	11	<u>F Size</u> 01,02...—Serial number (See Table1)	12	<u>G Size</u> 01,02...—Serial number (See Table1)	13	<u>Packaging</u> M—Reel		

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 26/DEC/19	PART NO. FPH10032—DXSXXX4XXXXXXM	ITEM NO. FPH10032	 Leader Of Industry	
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X'±5°	CHECKED BY	DATE	TITLE Board to Board(Pin Header) Pitch 1.00mm 180° Vertical(SMT)			
		X.X±.008(0.20)	X'±2°	CHERRY	26/DEC/19				
		SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		X.XXX±.004(0.10)	.XXX'±0.5°	ZOEY	26/DEC/19				

A

B

C

D

E

F

A

B

C

D

E


F


Table1

Serial number	Dimensions (in/mm) E	Serial number	Dimensions (in/mm) E
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		

Serial number	Dimensions (in/mm) F	Serial number	Dimensions (in/mm) F
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		

Serial number	Dimensions (in/mm) G	Serial number	Dimensions (in/mm) G
01	.138(3.50)	15	.276(7.00)
02	.148(3.75)	16	.285(7.25)
03	.157(4.00)	17	.295(7.50)
04	.167(4.25)	18	.305(7.75)
05	.177(4.50)	19	.315(8.00)
06	.187(4.75)	20	.325(8.25)
07	.197(5.00)	21	.335(8.50)
08	.207(5.25)	22	.344(8.75)
09	.217(5.50)	23	.354(9.00)
10	.226(5.75)	24	.364(9.25)
11	.236(6.00)	25	.374(9.50)
12	.246(6.25)	26	.384(9.75)
13	.256(6.50)	27	.394(10.00)
14	.266(6.75)		



 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 26/DEC/19	PART NO. FPH10032-DXXSXXX4XXXXXXM	ITEM NO. FPH10032	 Leader Of Industry
	X.±.012(0.30) X.'±5'		CHECKED BY CHERRY	DATE 26/DEC/19	TITLE Board to Board(Pin Header) Pitch 1.00mm 180° Vertical(SMT)		
	DESIGN UNITS Inch (metric)		X.XX±.006(0.15) .XX'±1'	DRAWN BY ZOEY	DATE 26/DEC/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	SCALE 5:1	SIZE A4	X.XXX±.004(0.10) .XXX'±0.5'				

REV 0	SHEET NO. 2/3
-------	---------------

1					2					3					4					5					6					7					8														
REV																									LOCATIONS					DESCRIPTION					DATE					REVUSER					APPD				

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
4	FPH10032-D04SXXX4XXXXXXM	.039(1.00)	.079(2.00)	44	FPH10032-D44SXXX4XXXXXXM	.827(21.00)	.866(22.00)
6	FPH10032-D06SXXX4XXXXXXM	.079(2.00)	.118(3.00)	46	FPH10032-D46SXXX4XXXXXXM	.866(22.00)	.906(23.00)
8	FPH10032-D08SXXX4XXXXXXM	.118(3.00)	.157(4.00)	48	FPH10032-D48SXXX4XXXXXXM	.906(23.00)	.945(24.00)
10	FPH10032-D10SXXX4XXXXXXM	.157(4.00)	.197(5.00)	50	FPH10032-D50SXXX4XXXXXXM	.945(24.00)	.984(25.00)
12	FPH10032-D12SXXX4XXXXXXM	.197(5.00)	.236(6.00)	52	FPH10032-D52SXXX4XXXXXXM	.984(25.00)	1.024(26.00)
14	FPH10032-D14SXXX4XXXXXXM	.236(6.00)	.276(7.00)	54	FPH10032-D54SXXX4XXXXXXM	1.024(26.00)	1.063(27.00)
16	FPH10032-D16SXXX4XXXXXXM	.276(7.00)	.315(8.00)	56	FPH10032-D56SXXX4XXXXXXM	1.063(27.00)	1.102(28.00)
18	FPH10032-D18SXXX4XXXXXXM	.315(8.00)	.354(9.00)	58	FPH10032-D58SXXX4XXXXXXM	1.102(28.00)	1.142(29.00)
20	FPH10032-D20SXXX4XXXXXXM	.354(9.00)	.394(10.00)	60	FPH10032-D60SXXX4XXXXXXM	1.142(29.00)	1.181(30.00)
22	FPH10032-D22SXXX4XXXXXXM	.394(10.00)	.443(11.00)	62	FPH10032-D62SXXX4XXXXXXM	1.181(30.00)	1.220(31.00)
24	FPH10032-D24SXXX4XXXXXXM	.443(11.00)	.472(12.00)	64	FPH10032-D64SXXX4XXXXXXM	1.220(31.00)	1.260(32.00)
26	FPH10032-D26SXXX4XXXXXXM	.472(12.00)	.512(13.00)	66	FPH10032-D66SXXX4XXXXXXM	1.260(32.00)	1.130(33.00)
28	FPH10032-D28SXXX4XXXXXXM	.512(13.00)	.551(14.00)	68	FPH10032-D68SXXX4XXXXXXM	1.130(33.00)	1.339(34.00)
30	FPH10032-D30SXXX4XXXXXXM	.551(14.00)	.591(15.00)	70	FPH10032-D70SXXX4XXXXXXM	1.339(34.00)	1.379(35.00)
32	FPH10032-D32SXXX4XXXXXXM	.591(15.00)	.630(16.00)	72	FPH10032-D72SXXX4XXXXXXM	1.379(35.00)	1.417(36.00)
34	FPH10032-D34SXXX4XXXXXXM	.630(16.00)	.669(17.00)	74	FPH10032-D74SXXX4XXXXXXM	1.417(36.00)	1.457(37.00)
36	FPH10032-D36SXXX4XXXXXXM	.669(17.00)	.709(18.00)	76	FPH10032-D76SXXX4XXXXXXM	1.457(37.00)	1.497(38.00)
38	FPH10032-D38SXXX4XXXXXXM	.709(18.00)	.748(19.00)	78	FPH10032-D78SXXX4XXXXXXM	1.497(38.00)	1.535(39.00)
40	FPH10032-D40SXXX4XXXXXXM	.748(19.00)	.787(20.00)	80	FPH10032-D80SXXX4XXXXXXM	1.535(39.00)	1.575(40.00)
42	FPH10032-D42SXXX4XXXXXXM	.787(20.00)	.827(21.00)				

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK		DATE 26/DEC/19	PART NO. FPH10032-DXXSXXX4XXXXXXM	ITEM NO. FPH10032	 Leader Of Industry		
			CHECKED BY CHERRY		DATE 26/DEC/19					
	DESIGN UNITS Inch (metric)		DRAWN BY ZOEY		DATE 26/DEC/19	TITLE Board to Board(Pin Header) Pitch 1.00mm 180° Vertical(SMT)		REV 0	SHEET NO. 3/3	
	SCALE 5:1	SIZE A4	X.XXX±.004(0.10) .XX±0.5°			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				