

Dimensions(in/mm)	
H	H1+H2
.118(3.00)	.059(1.50)+.059(1.50)
.138(3.50)	.059(1.50)+.079(2.00)
.157(4.00)	.079(2.00)+.079(2.00)
.177(4.50)	.079(2.00)+.098(2.50)
≧.197(5.00)	.098(2.50)+.098(2.50)

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD




SPECIFICATIONS

Electrical

Current Rating: 2.0A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 20 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 600V AC r.m.s
Temperature Range-Operating: -40°C~+105°C

Material

Housing: Glass Filled Polyester (UL 94V-0), Color: Black
Pin: Brass
Pin Plating: Gold plated/ Selective gold plated on contact area and 120μ" Min. matte tin plated on tails area

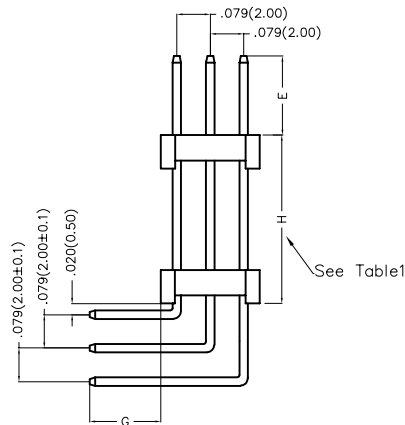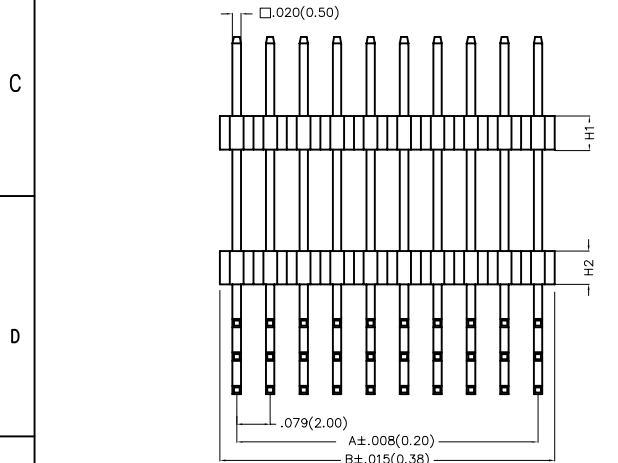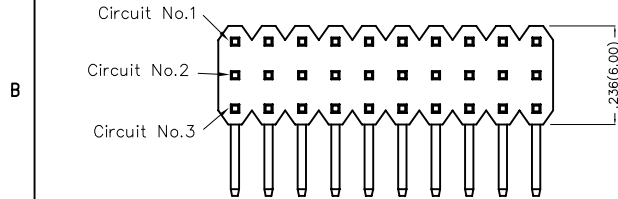


Ordering Information

FPH 200 59 - T XX B X XX X XX XX XX B
1 2 3 4 5 6 7 8 9 10 11 12 13

1 Category FPH-Pin Header	2 Series Number 200-Pitch2.00mm	3 Distinction No. 59	4 Row Option T-Three Row	5 Circuits XX	6 Entry Angle B-90° Angle	7 Plating 1-Gold plated 7-Selective gold plated on contact area and matte tin plated on tails area
------------------------------	------------------------------------	-------------------------	-----------------------------	------------------	------------------------------	--

8 Thickness of Plating 01-1μ" 15-15μ" Custom plate available	9 Material-Resin 1-PBT 4-PA6T	10 E Size 01,02...-Serial number (See Table1)	11 G Size 01,02...-Serial number (See Table1)	12 H Size 01,02...-Serial number (See Table1)	13 Packaging B-PE Bag
---	-------------------------------------	---	---	---	--------------------------

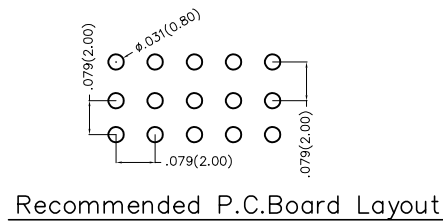

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 23/DEC/19	PART NO. FPH20059-TXXBXXXXXXXXXB	ITEM NO. FPH20059	 Leader Of Industry	
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 23/DEC/19	TITLE Board to Board(Pin Header) Pitch 2.00mm 90° Angle(DIP)			REV 0
	X.XX±.006(0.15)	.XX±1'	DRAWN BY ZOEY	DATE 23/DEC/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

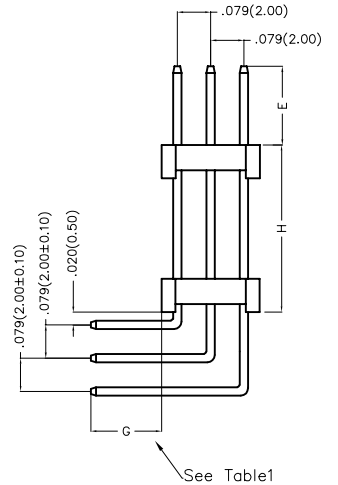
REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Table1

Serial number	Dimensions (in/mm) E	Serial number	Dimensions (in/mm) E
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		

Serial number	Dimensions (in/mm) G	Serial number	Dimensions (in/mm) G
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		



Serial number	Dimensions (in/mm) H	Serial number	Dimensions (in/mm) H
01	.118(3.00)	19	.472(12.00)
02	.138(3.50)	20	.492(12.50)
03	.157(4.00)	21	.512(13.00)
04	.177(4.50)	22	.531(13.50)
05	.197(5.00)	23	.551(14.00)
06	.217(5.50)	24	.571(14.50)
07	.236(6.00)	25	.591(15.00)
08	.256(6.50)	26	.610(15.50)
09	.276(7.00)	27	.630(16.00)
10	.295(7.50)	28	.650(16.50)
11	.315(8.00)	29	.669(17.00)
12	.335(8.50)	30	.689(17.50)
13	.354(9.00)	31	.709(18.00)
14	.374(9.50)	32	.728(18.50)
15	.394(10.00)	33	.748(19.00)
16	.413(10.50)	34	.768(19.50)
17	.433(11.00)	35	.787(20.00)
18	.453(11.50)		



<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Leader Of Industry</p>
	X.±.012(0.30)	X.±5'	FRANK	23/DEC/19	FPH20059-TXXBXXXXXXXXXB	FPH20059	
	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		
	X.XX±.006(0.15)	.XX'±1'	CHERRY	23/DEC/19	Board to Board(Pin Header) Pitch 2.00mm 90° Angle(DIP)		
SCALE	SIZE	X.XXX±.004(0.10)	.XXX'±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
5:1	A4			ZOEY	23/DEC/19	REV 0	SHEET NO. 2/3

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
12	FPH20059-T12BXXXXXXXXXB	.236(6.00)	.315(8.00)	69	FPH20059-T69BXXXXXXXXXB	1.732(44.00)	1.811(46.00)
15	FPH20059-T15BXXXXXXXXXB	.315(8.00)	.394(10.00)	72	FPH20059-T72BXXXXXXXXXB	1.811(46.00)	1.890(48.00)
18	FPH20059-T18BXXXXXXXXXB	.394(10.00)	.472(12.00)	75	FPH20059-T75BXXXXXXXXXB	1.890(48.00)	1.969(50.00)
21	FPH20059-T21BXXXXXXXXXB	.472(12.00)	.551(14.00)	78	FPH20059-T78BXXXXXXXXXB	1.969(50.00)	2.047(52.00)
24	FPH20059-T24BXXXXXXXXXB	.551(14.00)	.630(16.00)	81	FPH20059-T81BXXXXXXXXXB	2.047(52.00)	2.126(54.00)
27	FPH20059-T27BXXXXXXXXXB	.630(16.00)	.709(18.00)	84	FPH20059-T84BXXXXXXXXXB	2.126(54.00)	2.205(56.00)
30	FPH20059-T30BXXXXXXXXXB	.709(18.00)	.787(20.00)	87	FPH20059-T87BXXXXXXXXXB	2.205(56.00)	2.283(58.00)
33	FPH20059-T33BXXXXXXXXXB	.787(20.00)	.866(22.00)	90	FPH20059-T90BXXXXXXXXXB	2.283(58.00)	2.362(60.00)
36	FPH20059-T36BXXXXXXXXXB	.866(22.00)	.945(24.00)	93	FPH20059-T93BXXXXXXXXXB	2.362(60.00)	2.441(62.00)
39	FPH20059-T39BXXXXXXXXXB	.945(24.00)	1.024(26.00)	96	FPH20059-T96BXXXXXXXXXB	2.441(62.00)	2.520(64.00)
42	FPH20059-T42BXXXXXXXXXB	1.024(26.00)	1.102(28.00)	99	FPH20059-T99BXXXXXXXXXB	2.520(64.00)	2.598(66.00)
45	FPH20059-T45BXXXXXXXXXB	1.102(28.00)	1.181(30.00)	102	FPH20059-T102BXXXXXXXXXB	2.598(66.00)	2.677(68.00)
48	FPH20059-T48BXXXXXXXXXB	1.181(30.00)	1.260(32.00)	105	FPH20059-T105BXXXXXXXXXB	2.677(68.00)	2.756(70.00)
51	FPH20059-T51BXXXXXXXXXB	1.260(32.00)	1.339(34.00)	108	FPH20059-T108BXXXXXXXXXB	2.756(70.00)	2.835(72.00)
54	FPH20059-T54BXXXXXXXXXB	1.339(34.00)	1.417(36.00)	111	FPH20059-T111BXXXXXXXXXB	2.835(72.00)	2.913(74.00)
57	FPH20059-T57BXXXXXXXXXB	1.417(36.00)	1.496(38.00)	114	FPH20059-T114BXXXXXXXXXB	2.913(74.00)	2.992(76.00)
60	FPH20059-T60BXXXXXXXXXB	1.496(38.00)	1.574(40.00)	117	FPH20059-T117BXXXXXXXXXB	2.992(76.00)	3.071(78.00)
63	FPH20059-T63BXXXXXXXXXB	1.574(40.00)	1.654(42.00)	120	FPH20059-T120BXXXXXXXXXB	3.071(78.00)	3.150(80.00)
66	FPH20059-T66BXXXXXXXXXB	1.654(42.00)	1.732(44.00)				

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry	
	X.±.012(0.30)	X.±5'	FRANK	23/DEC/19	FPH20059-TXXBXXXXXXXXXB	FPH20059		
	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE			
	X.XX±.006(0.15)	.XX'±1'	CHERRY	23/DEC/19	Board to Board(Pin Header) Pitch 2.00mm 90° Angle(DIP)			
SCALE	SIZE		DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 3/3
5:1	A4		ZOEY	23/DEC/19				