

Dimensions(in/mm)	
H	E
.039(1.00)	.059(1.50)~.069(1.75)
.059(1.50)	.079(2.00)~.089(2.25)
.079(2.00)	.098(2.50)~.108(2.75)
.098(2.50)	≥.118(3.00)

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD




SPECIFICATIONS

Electrical

Current Rating:2.0A AC(rms)/DC
Voltage Rating:250V AC(rms)/DC
Contact Resistance:20 mΩ Max
Insulation Resistance:1000 MΩ Min
Withstanding Voltage:600V AC r.m.s
Temperature Range—Operating:−40°C~+105°C

Material


Housing:Glass Filled Polyester (UL 94V-0), Color: Black
Pin:Brass
Pin Plating: Gold plated/ Selective gold plated on contact area and 120μ" Min. matte tin plated on tails area

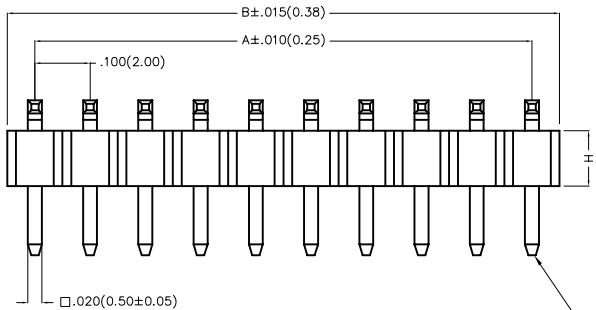

Circuit No.1

Ordering Information

FPH 200 61 - S XX B X XX X XX XX XX B
1 2 3 4 5 6 7 8 9 10 11 12 13

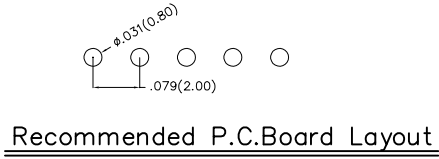

1 Category FPH-Pin Header	2 Series Number 200-Pitch2.00mm	3 Distinction No. 61	4 Row Option S-Single Row	5 Circuits XX	6 Entry Angle B-90° Angle	7 Plating 1-Gold plated 7-Selective gold plated on contact area and matte tin plated on tails area
8 Thickness of Plating 01-1μ" 15-15μ" Custom plate available	9 Material-Resin 1-PBT 4-PA6T	10 E Size 01,02...-Serial number (See Table1)	11 F Size 01,02...-Serial number (See Table1)	12 G Size 01,02...-Serial number (See Table1)	13 Packaging B-PE Bag	

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 23/DEC/19	PART NO. FPH20061-SXXBXXXXXXXXXB	ITEM NO. FPH20061	 Leader Of Industry REV 0 SHEET NO. 1/3
	X.±.012(0.30)	X'.±5'	CHECKED BY CHERRY	DATE 23/DEC/19	TITLE Board to Board(Pin Header) Pitch 2.00mm 90° Angle(DIP)		
	X.XX±.006(0.15)	.XX'±1'	DRAWN BY ZOEY	DATE 23/DEC/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

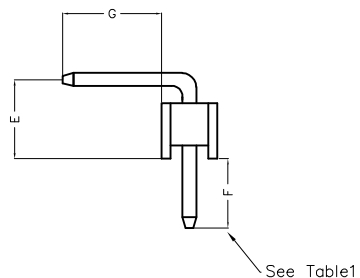
REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Table1

Serial number	Dimensions (in/mm) E	Serial number	Dimensions (in/mm) E
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		

Serial number	Dimensions (in/mm) F	Serial number	Dimensions (in/mm) F
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		



Serial number	Dimensions (in/mm) G	Serial number	Dimensions (in/mm) G
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		



<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Leader Of Industry</p>	
	X.±.012(0.30)	X.±5'	FRANK	23/DEC/19	FPH20061-SXXBXXXXXXXXXXB	FPH20061		
	DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		<p>REV 0</p> <p>SHEET NO. 2/3</p>
	SCALE 5:1	X.XX±.006(0.15)	.XX'±1'	CHERRY	23/DEC/19	Board to Board (Pin Header) Pitch 2.00mm 90° Angle(DIP)		
SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
			ZOEY	23/DEC/19				

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
1	FPH20061-S01BXXXXXXXXXB	—	.079(2.00)	21	FPH20061-S21BXXXXXXXXXB	1.574(40.00)	1.654(42.00)
2	FPH20061-S02BXXXXXXXXXB	.079(2.00)	.157(4.00)	22	FPH20061-S22BXXXXXXXXXB	1.654(42.00)	1.732(44.00)
3	FPH20061-S03BXXXXXXXXXB	.157(4.00)	.236(6.00)	23	FPH20061-S23BXXXXXXXXXB	1.732(44.00)	1.811(46.00)
4	FPH20061-S04BXXXXXXXXXB	.236(6.00)	.315(8.00)	24	FPH20061-S24BXXXXXXXXXB	1.811(46.00)	1.890(48.00)
5	FPH20061-S05BXXXXXXXXXB	.315(8.00)	.394(10.00)	25	FPH20061-S25BXXXXXXXXXB	1.890(48.00)	1.969(50.00)
6	FPH20061-S06BXXXXXXXXXB	.394(10.00)	.472(12.00)	26	FPH20061-S26BXXXXXXXXXB	1.969(50.00)	2.047(52.00)
7	FPH20061-S07BXXXXXXXXXB	.472(12.00)	.551(14.00)	27	FPH20061-S27BXXXXXXXXXB	2.047(52.00)	2.126(54.00)
8	FPH20061-S08BXXXXXXXXXB	.551(14.00)	.630(16.00)	28	FPH20061-S28BXXXXXXXXXB	2.126(54.00)	2.205(56.00)
9	FPH20061-S09BXXXXXXXXXB	.630(16.00)	.709(18.00)	29	FPH20061-S29BXXXXXXXXXB	2.205(56.00)	2.283(58.00)
10	FPH20061-S10BXXXXXXXXXB	.709(18.00)	.787(20.00)	30	FPH20061-S30BXXXXXXXXXB	2.283(58.00)	2.362(60.00)
11	FPH20061-S11BXXXXXXXXXB	.787(20.00)	.866(22.00)	31	FPH20061-S31BXXXXXXXXXB	2.362(60.00)	2.441(62.00)
12	FPH20061-S12BXXXXXXXXXB	.866(22.00)	.945(24.00)	32	FPH20061-S32BXXXXXXXXXB	2.441(62.00)	2.520(64.00)
13	FPH20061-S13BXXXXXXXXXB	.945(24.00)	1.024(26.00)	33	FPH20061-S33BXXXXXXXXXB	2.520(64.00)	2.598(66.00)
14	FPH20061-S14BXXXXXXXXXB	1.024(26.00)	1.102(28.00)	34	FPH20061-S34BXXXXXXXXXB	2.598(66.00)	2.677(68.00)
15	FPH20061-S15BXXXXXXXXXB	1.102(28.00)	1.181(30.00)	35	FPH20061-S35BXXXXXXXXXB	2.677(68.00)	2.756(70.00)
16	FPH20061-S16BXXXXXXXXXB	1.181(30.00)	1.260(32.00)	36	FPH20061-S36BXXXXXXXXXB	2.756(70.00)	2.835(72.00)
17	FPH20061-S17BXXXXXXXXXB	1.260(32.00)	1.339(34.00)	37	FPH20061-S37BXXXXXXXXXB	2.835(72.00)	2.913(74.00)
18	FPH20061-S18BXXXXXXXXXB	1.339(34.00)	1.417(36.00)	38	FPH20061-S38BXXXXXXXXXB	2.913(74.00)	2.992(76.00)
19	FPH20061-S19BXXXXXXXXXB	1.417(36.00)	1.496(38.00)	39	FPH20061-S39BXXXXXXXXXB	2.992(76.00)	3.071(78.00)
20	FPH20061-S20BXXXXXXXXXB	1.496(38.00)	1.574(40.00)	40	FPH20061-S40BXXXXXXXXXB	3.071(78.00)	3.150(80.00)

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry	
	X.±.012(0.30)	X'.±5'	FRANK	23/DEC/19	FPH20061-SXXBXXXXXXXXXB	FPH20061		
	X.XX±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE			
	X.XX±.006(0.15)	.XX'±1'	CHERRY	23/DEC/19	Board to Board(Pin Header) Pitch 2.00mm 90° Angle(DIP)			
SCALE	SIZE		DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 3/3
5:1	A4		ZOEY	23/DEC/19				