

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD




SPECIFICATIONS

Electrical

Current Rating: 3.0A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 20 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 600V AC r.m.s
Temperature Range—Operating: -40°C~+105°C

Material


Housing: Glass Filled Polyester (UL 94V-0), Color: Black
Pin: Brass
Pin Plating: Gold plated/ Selective gold in contact area, bright tin on tail

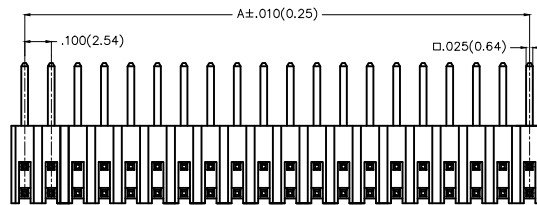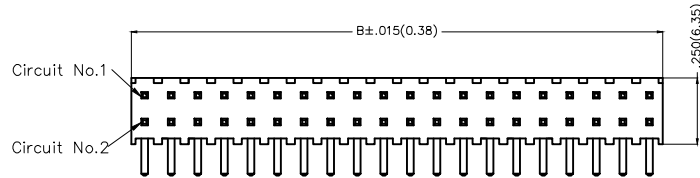

Ordering Information

FPH 254 35 — D XX B X XX X XX B
1 2 3 4 5 6 7 8 9 10 11

1 Category FPH-Pin Header	2 Series Number 254-Pitch 2.54mm	3 Distinction No. 35	4 Row Option D-Double Row	5 Circuits XX	6 Entry Angle B-90° Angle
7 Plating 1-Gold Plated 3-Selective gold in contact area, tin on tail 6-Selective gold in contact area, gold flash on tail	8 Thickness of Plating 01-1μ" 15-15μ" Custom plate available	9 Material-Resin 1-PBT 4-PA6T	10 Size 01,02... -Serial number (See Table1) Custom length available	11 Packaging B-PE Bag	





Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 29/JUL/13	PART NO. FPH25435-DXXBXXXXXB	ITEM NO. FPH25435	 Leader Of Industry	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X.±5° .X±2° .XX±1° .XXX±0.5°	CHECKED BY CHERRY	DATE 29/JUL/13	TITLE Board to Board(Pin Header) Pitch 2.54mm 90° Angle(DIP)		REV 0
SCALE 5:1	SIZE A4	DRAWN BY JACOB		DATE 29/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
2	FPH25435-D02BXXXXXXB	—	.100(2.54)	42	FPH25435-D42BXXXXXXB	2.000(50.80)	2.100(53.34)
4	FPH25435-D04BXXXXXXB	.100(2.54)	.200(5.08)	44	FPH25435-D44BXXXXXXB	2.100(53.34)	2.200(55.88)
6	FPH25435-D06BXXXXXXB	.200(5.08)	.300(7.62)	46	FPH25435-D46BXXXXXXB	2.200(55.88)	2.300(58.42)
8	FPH25435-D08BXXXXXXB	.300(7.62)	.400(10.16)	48	FPH25435-D48BXXXXXXB	2.300(58.42)	2.400(60.96)
10	FPH25435-D10BXXXXXXB	.400(10.16)	.500(12.70)	50	FPH25435-D50BXXXXXXB	2.400(60.96)	2.500(63.50)
12	FPH25435-D12BXXXXXXB	.500(12.70)	.600(15.24)	52	FPH25435-D52BXXXXXXB	2.500(63.50)	2.600(66.04)
14	FPH25435-D14BXXXXXXB	.600(15.24)	.700(17.78)	54	FPH25435-D54BXXXXXXB	2.600(66.04)	2.700(68.58)
16	FPH25435-D16BXXXXXXB	.700(17.78)	.800(20.32)	56	FPH25435-D56BXXXXXXB	2.700(68.58)	2.800(71.12)
18	FPH25435-D18BXXXXXXB	.800(20.32)	.900(22.86)	58	FPH25435-D58BXXXXXXB	2.800(71.12)	2.900(73.66)
20	FPH25435-D20BXXXXXXB	.900(22.86)	1.000(25.40)	60	FPH25435-D60BXXXXXXB	2.900(73.66)	3.000(76.20)
22	FPH25435-D22BXXXXXXB	1.000(25.40)	1.100(27.94)	62	FPH25435-D62BXXXXXXB	3.000(76.20)	3.100(78.74)
24	FPH25435-D24BXXXXXXB	1.100(27.94)	1.200(30.48)	64	FPH25435-D64BXXXXXXB	3.100(78.74)	3.200(81.28)
26	FPH25435-D26BXXXXXXB	1.200(30.48)	1.300(33.02)	66	FPH25435-D66BXXXXXXB	3.200(81.28)	3.300(83.82)
28	FPH25435-D28BXXXXXXB	1.300(33.02)	1.400(35.56)	68	FPH25435-D68BXXXXXXB	3.300(83.82)	3.400(86.36)
30	FPH25435-D30BXXXXXXB	1.400(35.56)	1.500(38.10)	70	FPH25435-D70BXXXXXXB	3.400(86.36)	3.500(88.90)
32	FPH25435-D32BXXXXXXB	1.500(38.10)	1.600(40.64)	72	FPH25435-D72BXXXXXXB	3.500(88.90)	3.600(91.44)
34	FPH25435-D34BXXXXXXB	1.600(40.64)	1.700(43.18)	74	FPH25435-D74BXXXXXXB	3.600(91.44)	3.700(93.98)
36	FPH25435-D36BXXXXXXB	1.700(43.18)	1.800(45.72)	76	FPH25435-D76BXXXXXXB	3.700(93.98)	3.800(96.52)
38	FPH25435-D38BXXXXXXB	1.800(45.72)	1.900(48.26)	78	FPH25435-D78BXXXXXXB	3.800(96.52)	3.900(99.06)
40	FPH25435-D40BXXXXXXB	1.900(48.26)	2.000(50.80)	80	FPH25435-D80BXXXXXXB	3.900(99.06)	4.000(101.60)

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 29/JUL/13	PART NO. FPH25435-DXXBXXXXXXB	ITEM NO. FPH25435	 Leader Of Industry	
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 29/JUL/13	TITLE Board to Board(Pin Header) Pitch 2.54mm 90° Angle(DIP)			REV 0
	DESIGN UNITS Inch (metric)	X.XX±.008(0.20)	.X'±2'	DRAWN BY JACOB	DATE 29/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z.)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX±.006(0.15)						
		X.XXX±.004(0.10)						