




Dimensions(in/mm)	
H	H1+H2
.118(3.00)	.059(1.50)+.059(1.50)
.138(3.50)	.059(1.50)+.079(2.00)
.157(4.00)	.079(2.00)+.079(2.00)
.177(4.50)	.079(2.00)+.098(2.50)
≥.197(5.00)	.098(2.50)+.098(2.50)

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
 Current Rating: 3.0A AC(rms)/DC
 Voltage Rating: 250V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 1000 MΩ Min
 Withstanding Voltage: 600V AC r.m.s
 Temperature Range-Operating: -40°C~+105°C

Material
 Housing: Glass Filled Polyester (UL 94V-0), Color: Black
 Pin: Brass
 Pin Plating: Gold plated/ Selective gold plated on contact area and 120μ" Min. matte tin plated on tails area

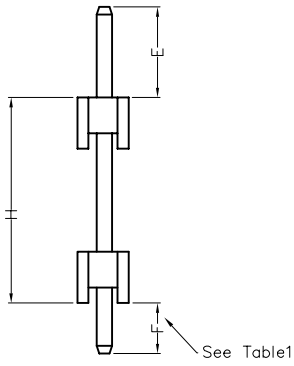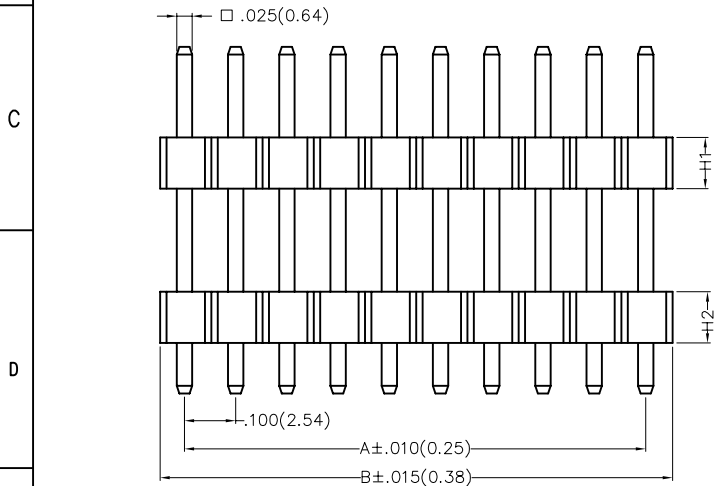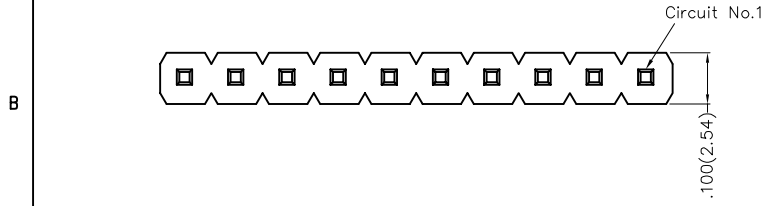


Ordering Information


FPH 254 49 - S XX S X XX X XX XX XX B
 1 2 3 4 5 6 7 8 9 10 11 12 13

1 Category FPH-Pin Header	2 Series Number 254-Pitch2.54mm	3 Distinction No. 49	4 Row Option S-Single Row	5 Circuits XX	6 Entry Angle S-180° Vertical	7 Plating 1-Gold plated 7-Selective gold plated on contact area and matte tin plated on tails area
------------------------------	------------------------------------	-------------------------	------------------------------	------------------	----------------------------------	--

8 Thickness of Plating 01-1μ" 15-15μ" Custom plate available	9 Material-Resin 1-PBT 4-PA6T	10 E Size 01,02...-Serial number (See Table1)	11 F Size 01,02...-Serial number (See Table1)	12 H Size 01,02...-Serial number (See Table1)	13 Packaging B-PE Bag
---	-------------------------------------	---	---	---	--------------------------



Recommended P.C.Board Layout

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 24/DEC/19	PART NO. FPH25449-SXXSXXXXXXXXXXB	ITEM NO. FPH25449	 Leader Of Industry	
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 24/DEC/19	TITLE Board to Board(Pin Header) Pitch 2.54mm 180° Vertical(DIP)			
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	DRAWN BY ZOEY	DATE 24/DEC/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 1/3


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Table1

Serial number	Dimensions (in/mm) E	Serial number	Dimensions (in/mm) E
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		

Serial number	Dimensions (in/mm) F	Serial number	Dimensions (in/mm) F
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)	A1	.394(1.9±0.1)

Serial number	Dimensions (in/mm) H	Serial number	Dimensions (in/mm) H
01	.118(3.00)	23	.551(14.00)
02	.138(3.50)	24	.571(14.50)
03	.157(4.00)	25	.591(15.00)
04	.177(4.50)	26	.610(15.50)
05	.197(5.00)	27	.630(16.00)
06	.217(5.50)	28	.650(16.50)
07	.236(6.00)	29	.669(17.00)
08	.256(6.50)	30	.689(17.50)
09	.276(7.00)	31	.709(18.00)
10	.295(7.50)	32	.728(18.50)
11	.315(8.00)	33	.748(19.00)
12	.335(8.50)	34	.768(19.50)
13	.354(9.00)	35	.787(20.00)
14	.374(9.50)	36	.807(20.50)
15	.394(10.00)	37	.827(21.00)
16	.413(10.50)	38	.846(21.50)
17	.433(11.00)	39	.866(22.00)
18	.453(11.50)	40	.886(22.50)
19	.472(12.00)	41	.906(23.00)
20	.492(12.50)	42	.925(23.50)
21	.512(13.00)	43	.945(24.00)
22	.531(13.50)		

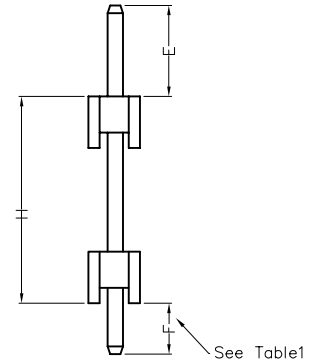

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Leader Of Industry</p>
	X.±.012(0.30)	X.±5'	FRANK	24/DEC/19	FPH25449-SXXSXXXXXXXXXXB	FPH25449	
	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		
	X.XX±.006(0.15)	.XX'±1'	CHERRY	24/DEC/19	Board to Board(Pin Header) Pitch 2.54mm 180° Vertical(DIP)		
SCALE	SIZE	X.XXX±.004(0.10)	.XXX'±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
5:1	A4			ZOEY	24/DEC/19	REV 0	SHEET NO. 2/3

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

A

B

B

C

C

D

D



E

E

F

F

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
1	FPH25449-S01SXXXXXXXXXXB	—	.100(2.54)	21	FPH25449-S21SXXXXXXXXXXB	2.000(50.80)	2.100(53.34)
2	FPH25449-S02SXXXXXXXXXXB	.100(2.54)	.200(5.08)	22	FPH25449-S22SXXXXXXXXXXB	2.100(53.34)	2.200(55.88)
3	FPH25449-S03SXXXXXXXXXXB	.200(5.08)	.300(7.62)	23	FPH25449-S23SXXXXXXXXXXB	2.200(55.88)	2.300(58.42)
4	FPH25449-S04SXXXXXXXXXXB	.300(7.62)	.400(10.16)	24	FPH25449-S24SXXXXXXXXXXB	2.300(58.42)	2.400(60.96)
5	FPH25449-S05SXXXXXXXXXXB	.400(10.16)	.500(12.70)	25	FPH25449-S25SXXXXXXXXXXB	2.400(60.96)	2.500(63.50)
6	FPH25449-S06SXXXXXXXXXXB	.500(12.70)	.600(15.24)	26	FPH25449-S26SXXXXXXXXXXB	2.500(63.50)	2.600(66.04)
7	FPH25449-S07SXXXXXXXXXXB	.600(15.24)	.700(17.78)	27	FPH25449-S27SXXXXXXXXXXB	2.600(66.04)	2.700(68.58)
8	FPH25449-S08SXXXXXXXXXXB	.700(17.78)	.800(20.32)	28	FPH25449-S28SXXXXXXXXXXB	2.700(68.58)	2.800(71.12)
9	FPH25449-S09SXXXXXXXXXXB	.800(20.32)	.900(22.86)	29	FPH25449-S29SXXXXXXXXXXB	2.800(71.12)	2.900(73.66)
10	FPH25449-S10SXXXXXXXXXXB	.900(22.86)	1.000(25.40)	30	FPH25449-S30SXXXXXXXXXXB	2.900(73.66)	3.000(76.20)
11	FPH25449-S11SXXXXXXXXXXB	1.000(25.40)	1.100(27.94)	31	FPH25449-S31SXXXXXXXXXXB	3.000(76.20)	3.100(78.74)
12	FPH25449-S12SXXXXXXXXXXB	1.100(27.94)	1.200(30.48)	32	FPH25449-S32SXXXXXXXXXXB	3.100(78.74)	3.200(81.28)
13	FPH25449-S13SXXXXXXXXXXB	1.200(30.48)	1.300(33.02)	33	FPH25449-S33SXXXXXXXXXXB	3.200(81.28)	3.300(83.82)
14	FPH25449-S14SXXXXXXXXXXB	1.300(33.02)	1.400(35.56)	34	FPH25449-S34SXXXXXXXXXXB	3.300(83.82)	3.400(86.36)
15	FPH25449-S15SXXXXXXXXXXB	1.400(35.56)	1.500(38.10)	35	FPH25449-S35SXXXXXXXXXXB	3.400(86.36)	3.500(88.90)
16	FPH25449-S16SXXXXXXXXXXB	1.500(38.10)	1.600(40.64)	36	FPH25449-S36SXXXXXXXXXXB	3.500(88.90)	3.600(91.44)
17	FPH25449-S17SXXXXXXXXXXB	1.600(40.64)	1.700(43.18)	37	FPH25449-S37SXXXXXXXXXXB	3.600(91.44)	3.700(93.98)
18	FPH25449-S18SXXXXXXXXXXB	1.700(43.18)	1.800(45.72)	38	FPH25449-S38SXXXXXXXXXXB	3.700(93.98)	3.800(96.52)
19	FPH25449-S19SXXXXXXXXXXB	1.800(45.72)	1.900(48.26)	39	FPH25449-S39SXXXXXXXXXXB	3.800(96.52)	3.900(99.06)
20	FPH25449-S20SXXXXXXXXXXB	1.900(48.26)	2.000(50.80)	40	FPH25449-S40SXXXXXXXXXXB	3.900(99.06)	4.000(101.60)

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 24/DEC/19	PART NO. FPH25449-SXXSXXXXXXXXXXB	ITEM NO. FPH25449	 Leader Of Industry
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 24/DEC/19	TITLE Board to Board(Pin Header) Pitch 2.54mm 180° Vertical(DIP)		
	X.XX±.008(0.20)	.X'±2'	DRAWN BY ZOEY	DATE 24/DEC/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	X.XX±.006(0.15)	.XX'±1'			REV 0	SHEET NO. 3/3	
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5'				

1 2 3 4 5 6 7 8