

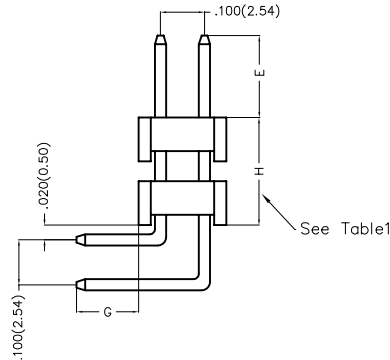
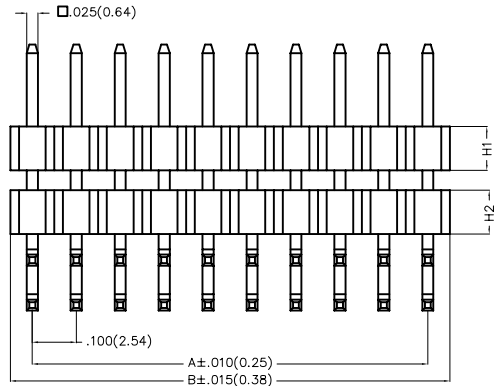


Dimensions(in/mm)

H	H1+H2
.118(3.00)	.059(1.50)+.059(1.50)
.138(3.50)	.059(1.50)+.079(2.00)
.157(4.00)	.079(2.00)+.079(2.00)
.177(4.50)	.079(2.00)+.098(2.50)
≥.197(5.00)	.098(2.50)+.098(2.50)



Recommended P.C.Board Layout

Tolerances: ±.002(±0.05)

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical

Current Rating: 3.0A AC(rms)/DC
 Voltage Rating: 250V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 1000 MΩ Min
 Withstanding Voltage: 600V AC r.m.s
 Temperature Range—Operating: -40°C~+105°C

Material

Housing: Glass Filled Polyester (UL 94V-0) , Color: Black
 Pin: Brass
 Pin Plating: Gold plated/ Selective gold plated on contact area and 120μ" Min. matte tin plated on tails area

Ordering Information

FPH 254 62 — D XX B X XX X XX XX XX B
 1 2 3 4 5 6 7 8 9 10 11 12 13

1 Category FPH—Pin Header	2 Series Number 254—Pitch 2.54mm	3 Distinction No. 62	4 Row Option D—Double Row	5 Circuits XX	6 Entry Angle B—90° Angle	7 Plating 1—Gold plated 7—Selective gold plated on contact area and matte tin plated on tails area
------------------------------	-------------------------------------	-------------------------	------------------------------	------------------	------------------------------	--

8 Thickness of Plating 01—1μ" 15—15μ" Custom plate available	9 Material—Resin 1—PBT 4—PA6T	10 E Size 01,02...—Serial number (See Table1)	11 G Size 01,02...—Serial number (See Table1)	12 H Size 01,02...—Serial number (See Table1)	13 Packaging B—PE Bag
---	-------------------------------------	---	---	---	--------------------------

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 24/DEC/19	PART NO. FPH25462-DXXBXXXXXXXXXXB	ITEM NO. FPH25462	 Leader Of Industry
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 24/DEC/19	TITLE Board to Board(Pin Header) Pitch 2.54mm 90° Angle(DIP)		
	X.X±.008(0.20)	.X'±2'	DRAWN BY ZOEY	DATE 24/DEC/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1/3
	X.XX±.006(0.15)	.XX'±1'					


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Table1

Serial number	Dimensions (in/mm) E	Serial number	Dimensions (in/mm) E
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		

Serial number	Dimensions (in/mm) G	Serial number	Dimensions (in/mm) G
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		

Serial number	Dimensions (in/mm) H	Serial number	Dimensions (in/mm) H
01	.118(3.00)	19	.472(12.00)
02	.138(3.50)	20	.492(12.50)
03	.157(4.00)	21	.512(13.00)
04	.177(4.50)	22	.531(13.50)
05	.197(5.00)	23	.551(14.00)
06	.217(5.50)	24	.571(14.50)
07	.236(6.00)	25	.591(15.00)
08	.256(6.50)	26	.610(15.50)
09	.276(7.00)	27	.630(16.00)
10	.295(7.50)	28	.650(16.50)
11	.315(8.00)	29	.669(17.00)
12	.335(8.50)	30	.689(17.50)
13	.354(9.00)	31	.709(18.00)
14	.374(9.50)	32	.728(18.50)
15	.394(10.00)	33	.748(19.00)
16	.413(10.50)	34	.768(19.50)
17	.433(11.00)	35	.787(20.00)
18	.453(11.50)		

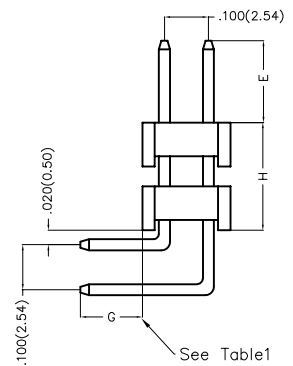

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 24/DEC/19	PART NO. FPH25462-DXXBXXXXXXXXXXB	ITEM NO. FPH25462	<p>Leader Of Industry</p>	
	X.±.012(0.30)	X'.±5'	CHECKED BY CHERRY	DATE 24/DEC/19	TITLE Board to Board(Pin Header) Pitch 2.54mm 90° Angle(DIP)			REV 0
	DESIGN UNITS Inch (metric)	X.X±.008(0.20)	X'.±2'	DRAWN BY ZOEY	DATE 24/DEC/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	SCALE 5:1	SIZE A4	X.XX±.006(0.15)	X'.±1'				

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B



C

D

E

F

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
4	FPH25462-D04BXXXXXXXXXB	.100(2.54)	.200(5.08)	44	FPH25462-D44BXXXXXXXXXB	2.100(53.34)	2.200(55.88)
6	FPH25462-D06BXXXXXXXXXB	.200(5.08)	.300(7.62)	46	FPH25462-D46BXXXXXXXXXB	2.200(55.88)	2.300(58.42)
8	FPH25462-D08BXXXXXXXXXB	.300(7.62)	.400(10.16)	48	FPH25462-D48BXXXXXXXXXB	2.300(58.42)	2.400(60.96)
10	FPH25462-D10BXXXXXXXXXB	.400(10.16)	.500(12.70)	50	FPH25462-D50BXXXXXXXXXB	2.400(60.96)	2.500(63.50)
12	FPH25462-D12BXXXXXXXXXB	.500(12.70)	.600(15.24)	52	FPH25462-D52BXXXXXXXXXB	2.500(63.50)	2.600(66.04)
14	FPH25462-D14BXXXXXXXXXB	.600(15.24)	.700(17.78)	54	FPH25462-D54BXXXXXXXXXB	2.600(66.04)	2.700(68.58)
16	FPH25462-D16BXXXXXXXXXB	.700(17.78)	.800(20.32)	56	FPH25462-D56BXXXXXXXXXB	2.700(68.58)	2.800(71.12)
18	FPH25462-D18BXXXXXXXXXB	.800(20.32)	.900(22.86)	58	FPH25462-D58BXXXXXXXXXB	2.800(71.12)	2.900(73.66)
20	FPH25462-D20BXXXXXXXXXB	.900(22.86)	1.000(25.40)	60	FPH25462-D60BXXXXXXXXXB	2.900(73.66)	3.000(76.20)
22	FPH25462-D22BXXXXXXXXXB	1.000(25.40)	1.100(27.94)	62	FPH25462-D62BXXXXXXXXXB	3.000(76.20)	3.100(78.74)
24	FPH25462-D24BXXXXXXXXXB	1.100(27.94)	1.200(30.48)	64	FPH25462-D64BXXXXXXXXXB	3.100(78.74)	3.200(81.28)
26	FPH25462-D26BXXXXXXXXXB	1.200(30.48)	1.300(33.02)	66	FPH25462-D66BXXXXXXXXXB	3.200(81.28)	3.300(83.82)
28	FPH25462-D28BXXXXXXXXXB	1.300(33.02)	1.400(35.56)	68	FPH25462-D68BXXXXXXXXXB	3.300(83.82)	3.400(86.36)
30	FPH25462-D30BXXXXXXXXXB	1.400(35.56)	1.500(38.10)	70	FPH25462-D70BXXXXXXXXXB	3.400(86.36)	3.500(88.90)
32	FPH25462-D32BXXXXXXXXXB	1.500(38.10)	1.600(40.64)	72	FPH25462-D72BXXXXXXXXXB	3.500(88.90)	3.600(91.44)
34	FPH25462-D34BXXXXXXXXXB	1.600(40.64)	1.700(43.18)	74	FPH25462-D74BXXXXXXXXXB	3.600(91.44)	3.700(93.98)
36	FPH25462-D36BXXXXXXXXXB	1.700(43.18)	1.800(45.72)	76	FPH25462-D76BXXXXXXXXXB	3.700(93.98)	3.800(96.52)
38	FPH25462-D38BXXXXXXXXXB	1.800(45.72)	1.900(48.26)	78	FPH25462-D78BXXXXXXXXXB	3.800(96.52)	3.900(99.06)
40	FPH25462-D40BXXXXXXXXXB	1.900(48.26)	2.000(50.80)	80	FPH25462-D80BXXXXXXXXXB	3.900(99.06)	4.000(101.60)
42	FPH25462-D42BXXXXXXXXXB	2.000(50.80)	2.100(53.34)				

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry		
	X.±.012(0.30)	X.±5'	FRANK	24/DEC/19				FPH25462-DXXBXXXXXXXXXB	FPH25462
	DESIGN UNITS Inch (metric)		CHECKED BY	DATE	TITLE			REV 0	SHEET NO. 3/3
	SCALE 5:1 SIZE A4		CHERRY	24/DEC/19	Board to Board(Pin Header) Pitch 2.54mm 90° Angle(DIP)				
		DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
		ZOEY	24/DEC/19						

1 2 3 4 5 6 7 8