



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Size changes	24/MAY/17	KATE	FRANK

SPECIFICATION

Electrical
 Impedance: 50Ω
 Frequency range: 0~6GHZ
 VSWR: 1.5Max
 Working Voltage: 250V AC
 Insulation Resistance: 5000MΩ Min.
 Withstand Voltage: 1000V, 50Hz rms.
 Temperature Range-Operating: -55°C~+155°C
 Relative Humidity: 95% Max. (40°C±2°C)

Material And Plating
 Insulator: TEFLON (UL 94V-0), White
 Body: Brass/ Gold Plated
 Center Pin: Brass/ Gold Plated
 Ferrule: Brass/ Gold Plated
 C-ring: SUS
 Airproof Ring: Silicone Rubber

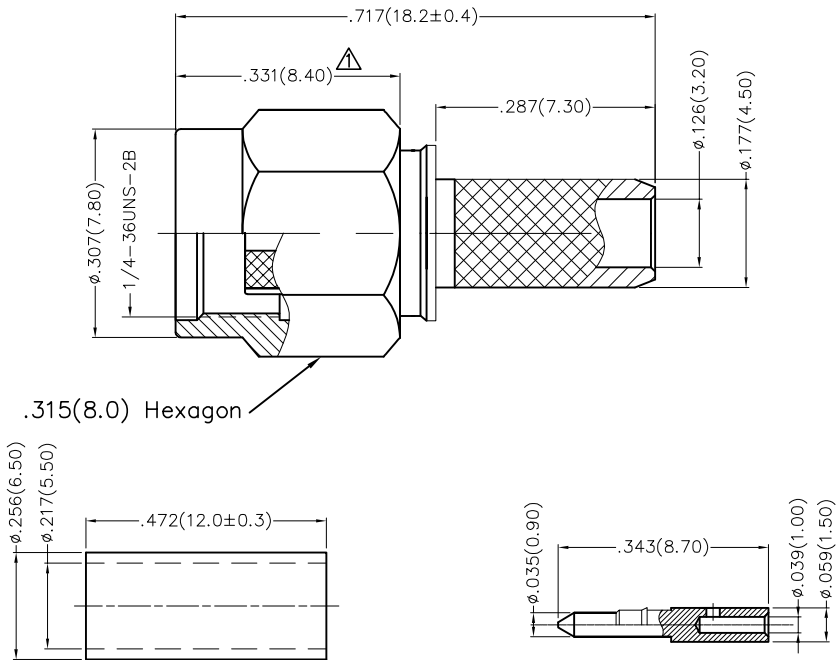

Recommend Cutting Dim. of Cable(Ref)

Ordering Information

FRF 01 011 - P C S 1 XX B
 1 2 3 4 5 6 7 8 9

1 Category FRF-Radio Frequency	2 Series Number 01-SMA Series	3 Distinction No. 011	4 Type P-Plug	5 Assemble Layout C-Crimping Type
6 Entry Angle S-180°Vertical	7 Plating 1-Gold Plated	8 Thickness of Plating 00-Gold Flash 03-3μ" Custom plate available	9 Packaging B-PE Bag	

<p>THIRD ANGLE PROJECTION</p>	<p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p>		<p>APPROVE BY FRANK</p>	<p>DATE 20/JUL/16</p>	<p>PART NO. FRF01011-PCS1XXB</p>	<p>ITEM NO. FRF01011</p>	<p>TXGA Building Technology Cornerstone</p>
	<p>DESIGN UNITS Inch (metric)</p>	<p>X.±.012(0.30)</p>	<p>X.±5'</p>	<p>CHECKED BY KATE</p>	<p>DATE 20/JUL/16</p>	<p>TITLE SMA Plug For RG195 RG58/U Cable</p>	
<p>SCALE 5:1</p>	<p>SIZE A4</p>	<p>X.XX±.006(0.15)</p>	<p>.XX±1'</p>	<p>DRAWN BY CHERRY</p>	<p>DATE 20/JUL/16</p>	<p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p>	
		<p>X.XXX±.004(0.10)</p>	<p>.XXX±0.5'</p>			<p>REV 1</p>	<p>SHEET NO. 1/1</p>